

N6-65 and N6-E



datasheet

N6-65 and N6-E are linear profiles for surface installation on walls and false ceilings. N6-65 is IP65-rated and comes in 4 standard pre-cut lengths, available in dim to warm, and 3 static white color temperatures. N6-E is IP40-rated and custom cuttable in the field, available in dim to warm, RGBW and 4 static white options. Both are anodized aluminum with diffused optics.



Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage	19.2W per 3.28 ft (1 m)
Power Supply	Remote 24VDC, not included. See page 3.
Construction	Body: Anodized Aluminum Cable Length: 1.64' (connected at rear)
CCT	N6-65: 2700K, 3000K, 4000K, Dim Warm N6-E: 2200K, 2700K, 3000K, 4000K, Dim Warm, RGB+W (3000K)
Delivered Lumens	1520 lm per 3.28' (3000K) 1593 lm per 3.28' (DimWarm) 864 lm per 3.28' (RGBW)
Efficacy	79.2 lm/W per 3.28" (3000K) 83 lm/W per 3.28" (DimWarm) 45 lm/W per 3.28" (RGBW)
Optics	Diffuse
Finishes	Anodized Aluminum
Fixture Dimensions	19.7", 39.4", 59.1", 78.7" l x 0.7" w x 1.2" h (N6-65) 118.1" x 0.7" w x 1.2" h (N6-E) 196.9" x 0.3" (LED Circuit Reel)
Color Consistency	<3-Step MacAdam
IP Rating	IP65, IP40 (N6-E)
Impact Resistance	IK08, IK05 (N6-E)

ORDERING INFORMATION

Example: LM04.104635.US.03.DI.BP.P. Accessories / Power Supplies ordered separately.





	03				
Model No.	Finish	Optic	CCT	Cable Exit	
LM04.104633.US (19.7" length)	03 - Anodized Aluminum	DI - Diffuse	BC - 2700K	P - Rear Exit	
LM04.104634.US (39.4" length)			BP - 3000K		
LM04.104635.US (59.1" length)			BF - 4000K		
LM04.104636.US (78.7" length)			DW - DimWarm (2800K-6000K)		
LM30.103514.US (Circuit Reel) <i>Profile housing sold separately and can be found under installation accessories on page 2</i>		DP - Perpendicular Diffuse	RGBW - RGB+W (3000K) XC - 2200K <i>RGBW & 2200K only available on N1-E</i>	Circuit Power	20 - 19.2W/3.28 ft

Job Name/Date:

Fixture Type Designation:



FIXTURE DIMENSIONS - N6-65

Standard Lengths

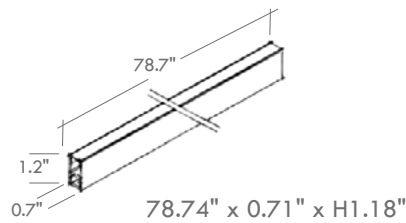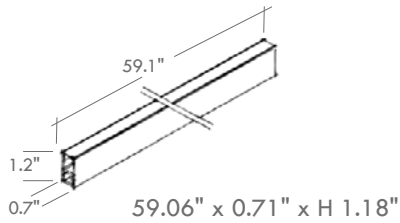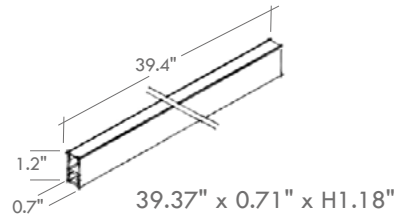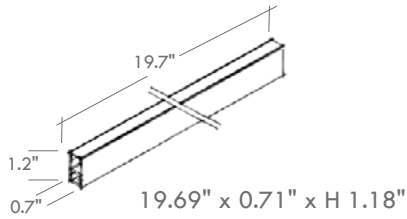

FIXTURE DIMENSIONS - N6-E

Custom Cuttable

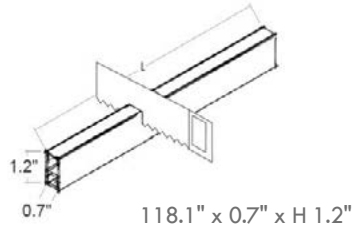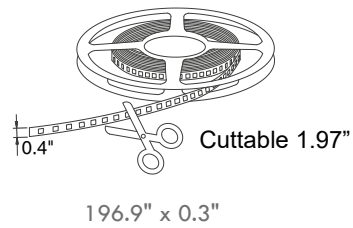


ACCESSORIES - Installation



LM30.104643.US
(118.1" length)
Housing for Custom Cuttable

ACCESSORIES - Installation

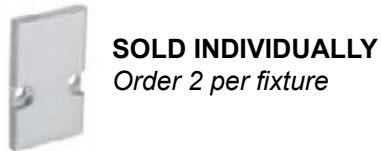

LM20.104639
Closing End Cap
Dimens. 1.2" x 0.7" x 0.1"



LM20.104640
Closing End Cap with hole
Dimens. 1.2" x 0.7" x 0.1"

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC


Part Number	Description	Input/Output	# of Fixtures - 19W per 3.28'			
			19.7"	39.4"	59.1"	78.7"
PPLT00599	ELV/TRIAC & 0-10V Dimming (100-0%)	120-277VAC to 24VDC, 96W, Class 2	1-8	1-4	1-2	1-1
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-8	1-4	1-2	1-1
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-8	1-4	1-2	1-1

For cut lengths and other power supply options, consult factory.

For DIM WARM or RGBW power supplies, contact factory.

PHOTOMETRIC DATA

Note: All photometric data is 3000K

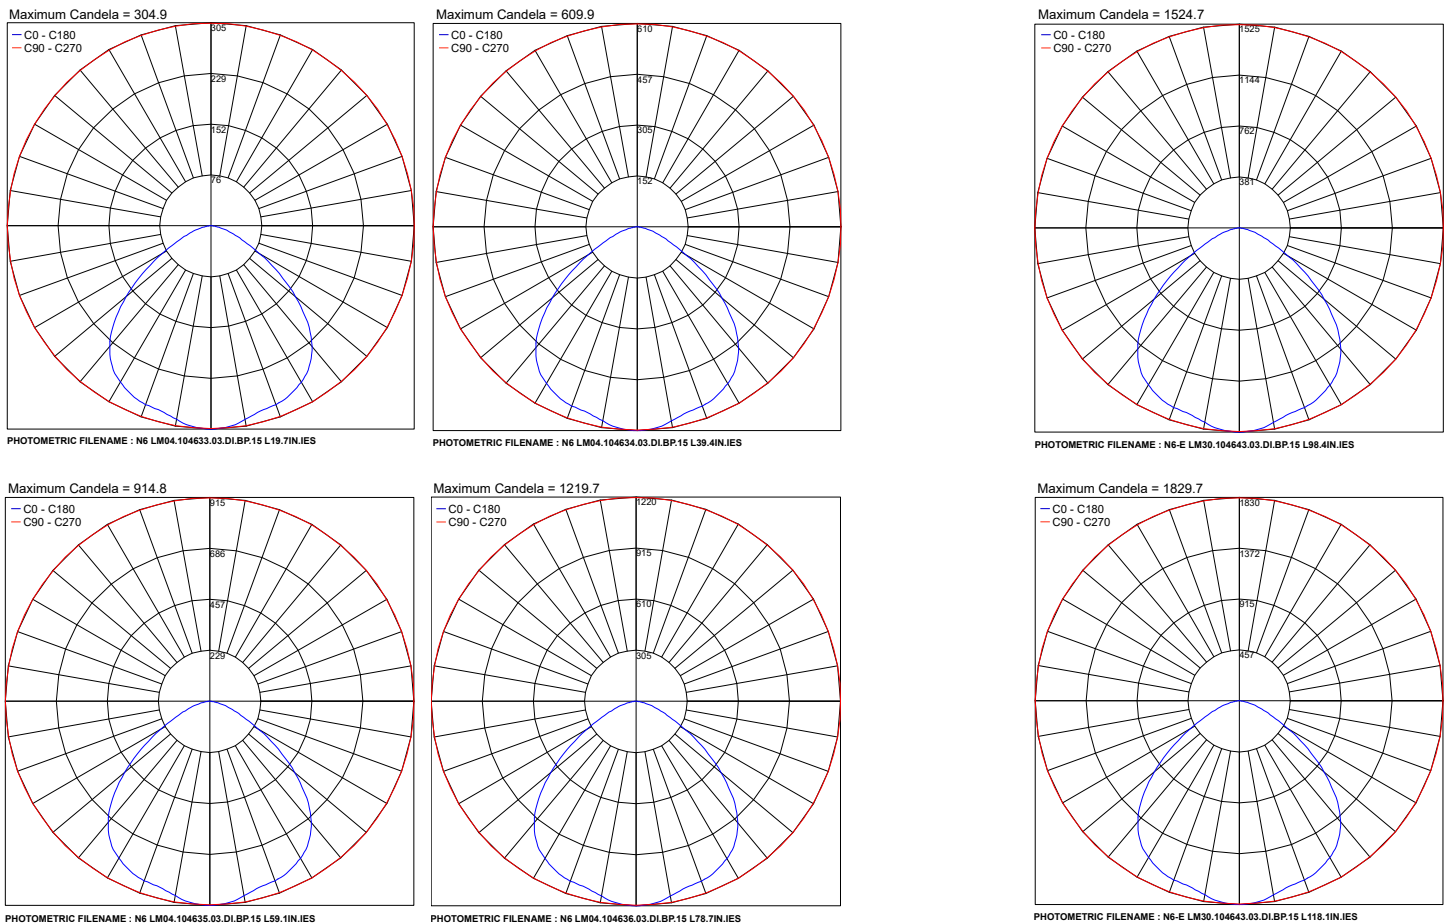

Job Name/Date:

Fixture Type Designation: