


Nobel Eclips is a small, recessed LED downlight suitable for indoor installation on ceilings that is tiltable to 30°. It is available in 2 color temperatures, 3 optics options and 6 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	3.82W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Aluminum
<b>CCT</b>	2700K, 3000K (4000K on request)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	433 lm (3000K)
<b>Efficacy</b>	113.4 lm/W (3000K)
<b>Optics</b>	15°, 36°, 50°
<b>Finishes</b>	6 Standard, See Below
<b>LED Source</b>	BRIDGELUX LED
<b>Fixture Dimensions</b>	Ø2.52" x 1.97"
<b>Cutout Dimensions</b>	Ø2.20"
<b>Installation Depth</b>	2.56" solid / 1.97" hollow ceilings
<b>Fixture Weight</b>	0.44 lbs
<b>IP Rating</b>	IP20

Fixture Dimensions

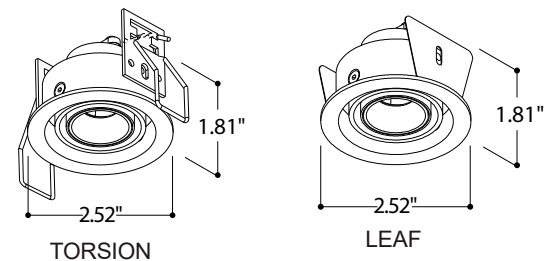

## ORDERING INFORMATION

Example: T697147W. Power Supplies ordered separately.

Model No.	Description
<b>T697147</b>	Torsion, 2700K, Textured White + White Focus
<b>T697194</b>	Torsion, 2700K, Textured White + Black Focus
<b>T697192</b>	Torsion, 2700K, Textured White + Gold Focus
<b>T697185</b>	Torsion, 2700K, Textured Black + White Focus
<b>T697116</b>	Torsion, 2700K, Textured Black + Black Focus
<b>T697186</b>	Torsion, 2700K, Textured Black + Gold Focus
<b>T697137</b>	Torsion, 3000K, Textured White + White Focus
<b>T697184</b>	Torsion, 3000K, Textured White + Black Focus
<b>T697182</b>	Torsion, 3000K, Textured White + Gold Focus
<b>T697185</b>	Torsion, 3000K, Textured Black + White Focus
<b>T697116</b>	Torsion, 3000K, Textured Black + Black Focus
<b>T697186</b>	Torsion, 3000K, Textured Black + Gold Focus

Model No.	Description
<b>T697447</b>	Leaf, 2700K, Textured White + White Focus
<b>T697494</b>	Leaf, 2700K, Textured White + Black Focus
<b>T697492</b>	Leaf, 2700K, Textured White + Gold Focus
<b>T697185</b>	Leaf, 2700K, Textured Black + White Focus
<b>T697426</b>	Leaf, 2700K, Textured Black + Black Focus
<b>T697496</b>	Leaf, 2700K, Textured Black + Gold Focus
<b>T697437</b>	Leaf, 3000K, Textured White + White Focus
<b>T697484</b>	Leaf, 3000K, Textured White + Black Focus
<b>T697482</b>	Leaf, 3000K, Textured White + Gold Focus
<b>T697185</b>	Leaf, 3000K, Textured Black + White Focus
<b>T697416</b>	Leaf, 3000K, Textured Black + Black Focus
<b>T697486</b>	Leaf, 3000K, Textured Black + Gold Focus

### Optic

N - 15°

M - 36°

W - 50°

## OPTICS ORDERING INFORMATION

Please add on of the below onto code for optic.

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00148</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 6W, Class 2	1-1
<a href="#">PPLT00496</a>	Phase Dimming (120V Only)	120VAC to 350mA, 12W, Class 2, DAMP	1-2
<a href="#">PPLT00467-P</a>	0-10V Dimming (to 1.0%)	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-4

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00247</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-3
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	3-4

For other power supply options consult factory.

## ACCESSORIES - Installation


### T178000

Installation Box for Plaster

## PHOTOMETRIC DATA

Note all Photometry is 2700K

Maximum Candela = 696

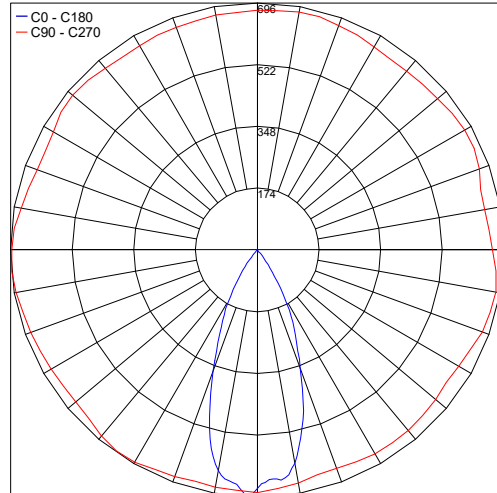

PHOTOMETRIC FILENAME : MICRO ECLIPS TORSION 2700K 3.8W.IES

Job Name/Date:

Fixture Type Designation: