QUBO MINI HP

datasheet


The Qubo Mini HP is a square, outdoor LED floodlight suitable for installation on a façade/wall with a U-shaped fixing bracket allowing vertical adjustment of +90° / -40°. It has 3 standard finishes and 3 optics options.



TECHNICAL DATA

Wattage / Input	8W (120VAC)
Power Supply	Integral 0-10V Dimming
Construction	Body: Die-Cast Copper-Free Aluminum Screws: Stainless Steel Lens: Tempered, Safety Glass Cable Length: 3.28” included
CCT	2700K, 3000K, 4000K
CRI	>80
Lumen Output	662 lm (3000K, 10°)
Efficacy	82.8 lm/W (3000K, 10°)
Optics	3 Standard (see below)
Finishes	3 Standard, Custom RAL (see below)
Fixture Dimensions	3.94” l x 3.94” w x 5.71” h
Fixture Weight	2.87 lbs
LED Source	1 x CREE “XHP35” LED
IP Rating	IP66
Impact Rating	IK10

Fixture Dimensions

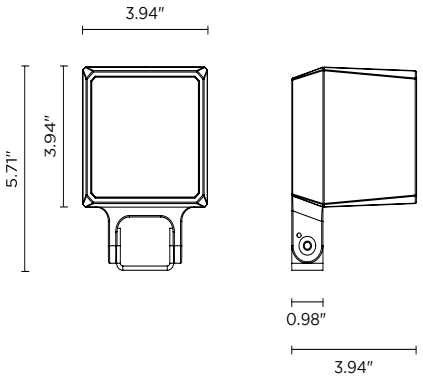

ORDERING INFORMATION

Example: 101605P-30-10-02. Accessories ordered separately.

101605P	-		-		-	

Model No.	CCT	Optics	Finish
101605P	**27** - 2700K **30** - 3000K **40** - 4000K	**04** - 4° **10** - 10° **28** - 28° **55** - 55°	**01** - Textured Grey (RAL 9006) **02** - Anthracite Grey (RAL 7016) **03** - Matte Black (on request)

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2019 Designplan Lighting, Inc.

Published: November 23, 2026

P: 908-996-7710
F: 908-996-7042

QUBO MINI HP

datasheet


ACCESSORIES

Installation



AC044
Ground Spike

Anti-Glare



AC072
Honeycomb Louver



AC076
Anti-Glare Visor




AC038
Tree Strap
for Ring Series

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 10144.1

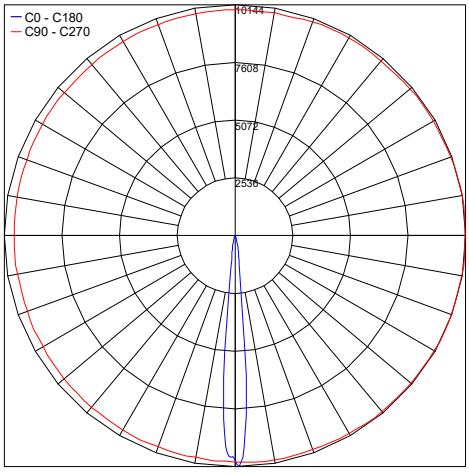


PHOTOMETRIC FILENAME : QUBO MINI HP 3000K 4° 8W 101605P.IES

Maximum Candela = 5315.7

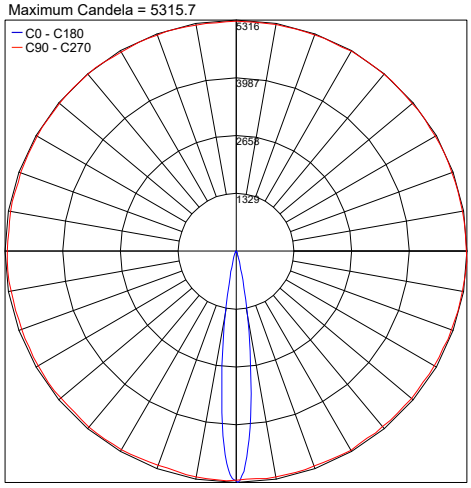

PHOTOMETRIC FILENAME : QUBO MINI HP 3000K 10° 8W 101605P.IES

Maximum Candela = 2120.5

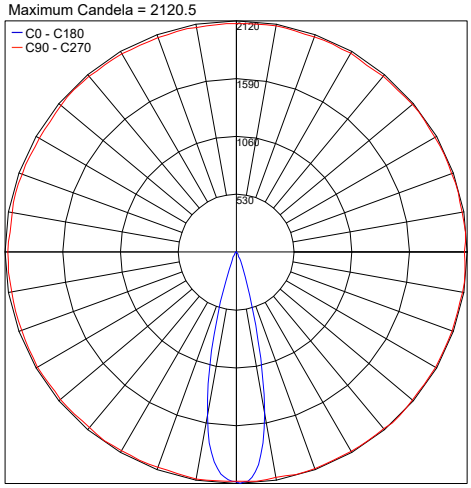

PHOTOMETRIC FILENAME : QUBO MINI HP 3000K 28° 8W 101605P.IES

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825
© Copyright 2019 Designplan Lighting, Inc.
Published: November 23, 2026
P: 908-996-7710
F: 908-996-7042