


RING MAXI RGBW

The Ring Maxi RGBW is an outdoor LED floodlight suitable for installation on a façade/wall, with 355° swivel base and horizontal adjustment of +90° / -40°. It has 3 standard finishes and 3 optics options.



Base Plate Included with Fixture

Fixture Dimensions

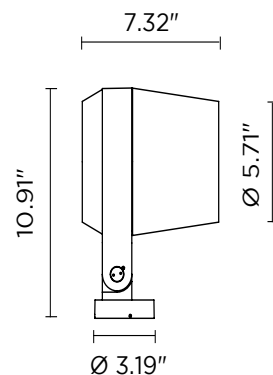

TECHNICAL DATA

Wattage / Input	28W (24VDC)
Power Supply	Remote with DMX driver integrated See page 2 for remote power supplies
Construction	Body: Die-Cast Copper-Free Aluminum Screws: Stainless Steel Lens: Tempered, Safety Glass Cable Length: 3.28" included
CCT	RGBW - DMX Control Built Into Fixture
CRI	>80
Lumen Output	992 lm (25°)
Efficacy	35.4 lm/W (25°)
Optics	3 Standard (see below)
Finishes	3 Standard, Custom RAL (see below)
Fixture Dimensions	Ø5.71" x 7.32" w x 10.91" h
Fixture Weight	8.82 lbs
LED Source	6 CREE "XML" RGBW LED
IP Rating	IP66
Impact Rating	IK10

ORDERING INFORMATION

Example: 101406RGBWP-12-TG. Power Supplies / Accessories ordered separately.

101406RGBWP		-		-	
Model No.		Optics		Finish	
101406RGBWP		12 - 12° 25 - 25° 35 - 35°		TG - Textured Grey (RAL 9006) AG - Anthracite Grey (RAL 7016) MB - Matte Black (on request)	

Job Name/Date:

Fixture Type Designation:


ACCESSORIES

Installation

Anti-Glare



AC044
Ground Spike



AC050
Honeycomb Louver



AC038
Tree Strap
for Ring Series




AC047
Anti-glare visor

ACCESSORIES - Optional



AC085
Pole Plate



AC088
Tree Branch
Bracket

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00156	Non-Dim	120VAC to 24VDC, 45W, Class 2	1-1
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-2
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-2

For other power supply options consult factory.

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: