

RIO 1 SERIES

RIO 1.0, 1.1, 1.2, 1.3, 1.4

Slim, sleek and tough, the Rio Series illuminates ground, wall and ceiling installations with no dark zone between fixtures. Available in Static White or RGB and with the use of the aluminum housing is driveover up to 11,000 lbs.

TECHNICAL DATA

Wattage / Input	See Chart on page 2. (24VDC)
Power Supply	Remote, not included. See page 3.
Construction	Body: PMMA End Caps: 316L Stainless Steel Lens: Opal PMMA Housing: Aluminum or Stainless Steel
CCT	2600K, 2800K, 3700K, RGB
CRI	CRI >80
Delivered Lumens	See Chart on page 2.
Efficacy	23 lm/W (White), 11 lm/W (RGB)
Optics	Diffuse
Finishes	N/A
Cut-Out Dimensions	See Chart on page 2.
Fixture Dimensions	See Chart on page 2.
Fixture Weight	See Chart on page 2.
LED Source	SMD Low Power (SW), SMD Full Color (RGB)
Lumen Maintenance	L80 >50,000hrs
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP67
Impact Rating	IK10
Driveover	Up to 11,000 lbs (With aluminum housing)



Fixture Dimensions
(see drawings on page 2)

ORDERING INFORMATION

Example: RE10005DB or RE10005DB-1. Accessories / Power Supplies ordered separately.

Model No.	CCT	Optics	Cable Length
RE1000 - Rio 1.0	F - 2600K	DB - Diffuse	4.92' standard
RE1100 - Rio 1.1	5 - 2800K		1 - 16.40'
RE1200 - Rio 1.2	9 - 3700K		2 - 32.81' - <i>not for use with RGB</i>
RE1300 - Rio 1.3	6 - RGB - only uses standard 4.92'		3 - 49.21' - <i>not for use with RGB</i>
RE1400 - Rio 1.4	or 16.40' cable		4 - 65.62' - <i>not for use with RGB</i>

Job Name/Date:






Fixture Type Designation:

RIO 1 SERIES

RIO 1.0, 1.1, 1.2, 1.3, 1.4

TECHNICAL DATA

	RIO 1.0		RIO 1.1		RIO 1.2		RIO 1.3		RIO 1.4	
	WHITE	RGB	WHITE	RGB	WHITE	RGB	WHITE	RGB	WHITE	RGB
Wattage	3W	4.5W	6W	8.5W	12W	17W	18W	26W	24W	34W
Delivered Lumens (2800K)	70 lm	50 lm	140 lm	100 lm	280 lm	200 lm	420 lm	300 lm	560 lm	400 lm
Fixture Dim. (l,w,h)	10.24" x 0.79" x 2.09"		20.08" x 0.79" x 2.09"		39.76" x 0.79" x 2.09"		59.45" x 0.79" x 2.09"		79.13" x 0.79" x 2.09"	
Alum. Housing Dim. (l,w,h) & Cut-Out Size (l,w)	10.39" x 1.02" x 2.95" 10.39" x 1.02"		20.24" x 1.02" x 2.95" 20.24" x 1.02"		39.92" x 1.02" x 2.95" 39.92" x 1.02"		59.65" x 1.02" x 2.95" 59.65" x 1.02"		79.33" x 1.02" x 2.95" 79.33" x 1.02"	
SS Housing Dim. (l,w,h) & Cut-Out Size (l,w)	10.35" x 1.02" x 3.50" 10.35" x 2.83"		20.20" x 1.02" x 3.50" 20.20" x 2.83"		39.88" x 1.02" x 3.50" 39.88" x 2.83"		59.61" x 1.02" x 3.50" 59.61" x 2.83"		79.29" x 1.02" x 3.50" 79.29" x 2.83"	
Fixture Weight	0.46 lb		0.93 lb		1.83 lb		2.82 lb		3.31 lb	

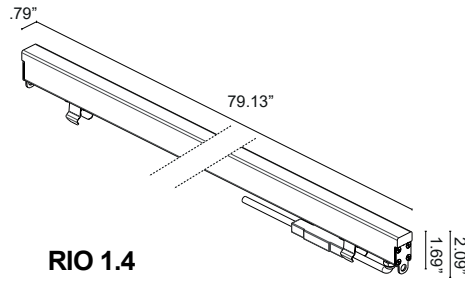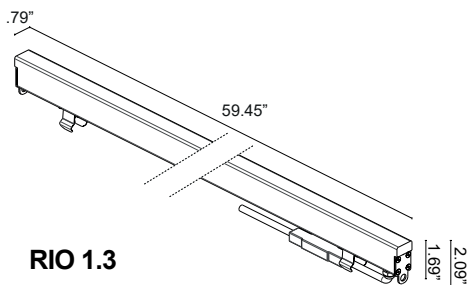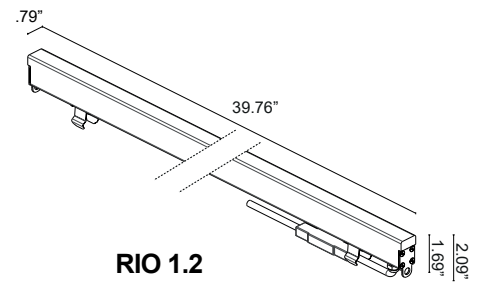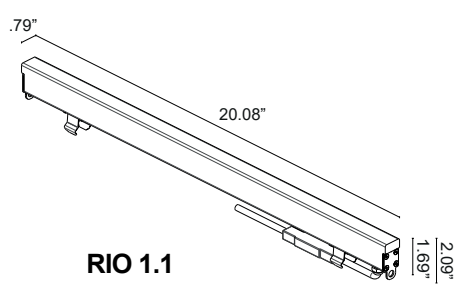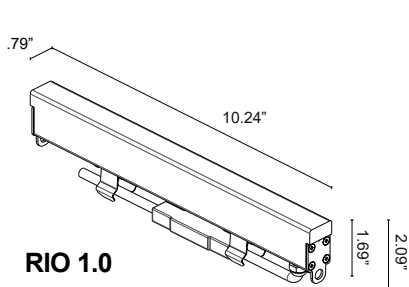

Job Name/Date:

Fixture Type Designation:

RIO 1 SERIES

RIO 1.0, 1.1, 1.2, 1.3, 1.4

SUGGESTED POWER SUPPLIES

STATIC WHITE, 24VDC


Part Number	Description	Input/Output	# of Fixtures / Power Supply				
			Rio 1.0	Rio 1.1	Rio 1.2	Rio 1.3	Rio 1.4
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-3	1-1	-	-	-
PPLT00157	Non-Dim	120VAC to 24VDC, 60W	1-16	1-8	1-4	1-2	1
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-25	1-12	1-6	1-4	1-3
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, DAMP	1-26	1-13	1-6	1-4	1-3
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W	4-26	2-13	1-6	1-4	1-3

RGB, 24VDC

Part Number	Description	Input/Output	# of Fixtures / Power Supply				
			Rio 1.0	Rio 1.1	Rio 1.2	Rio 1.3	Rio 1.4
PPLT00288	DMX / RDM (Field Addressable) /Dali	120-277VAC to 24VDC, 100W	1-17	1-9	1-4	1-3	1-2

For other power supply options consult factory.

ACCESSORIES - Installation



Aluminum Outer Casing

***Must use for Driveover applications**

(Aluminum has been treated to avoid corrosion when in contact with concrete.)


WC8110 - Rio 1.0 (L 10.39")

WC8111 - Rio 1.1 (L 20.24")

WC8112 - Rio 1.2 (L 39.92")

WC8113 - Rio 1.3 (L 59.65")

WC8114 - Rio 1.4 (L 79.33")



Stainless Steel Outer Casing


WC8150 - Rio 1.0 (L 10.35")

WC8151 - Rio 1.1 (L 20.20")

WC8152 - Rio 1.2 (L 39.88")

WC8153 - Rio 1.3 (L 59.61")

WC8154 - Rio 1.4 (L 79.29")



Aluminum Outer Casing for Plasterboard

WC8310 - Rio 1.0 (L 10.39")

WC8311 - Rio 1.1 (L 20.24")

WC8312 - Rio 1.2 (L 39.92")

WC8313 - Rio 1.3 (L 59.65")


WC8314 - Rio 1.4 (L 79.33")

Job Name/Date:

Fixture Type Designation:

RIO 1 SERIES

RIO 1.0, 1.1, 1.2, 1.3, 1.4

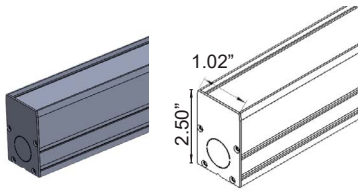

Aluminum Outer Casing 2.5" h

WCD910 - Rio 1.0 (L 10.39")

WCD911 - Rio 1.1 (L 20.24")

WCD912 - Rio 1.2 (L 39.92")

WCD913 - Rio 1.3 (L 59.65")

WCD914 - Rio 1.4 (L 79.33")

ACCESSORIES - Installation



WN8011 - Alignment Kit
For Stainless Steel Outer Casings



WN6006 - Extractors (Pair)
To Remove Fixture from Outer Casings



WN6005 - Alignment Kit
For Aluminum Outer Casings



WN8101 - Fixture Anti Fall Kit
Optional for Ceiling (and if desired Wall) Installations




WND600525- Alignment Kit
For Aluminum 2.5" Outer Casings



WN8003 - U-Shaped Brackets (Pair)
For Plasterboard

PHOTOMETRIC DATA

D - Diffuse (Rio 1.0)

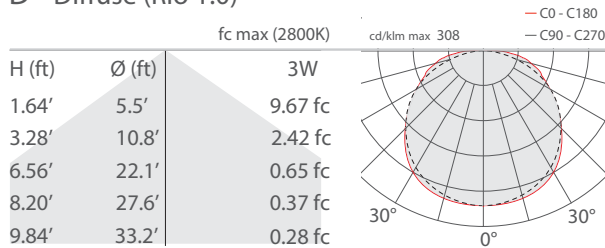

Job Name/Date:

Fixture Type Designation: