


TECH MEDIUM 02 SQUARE


Tech Medium 02 Square is a wall mounted luminaire for outdoor installation with an up and down light distribution and adjustable +/- 15°. It is available in 2 color temperatures, 3 optic options and 3 standard finishes.

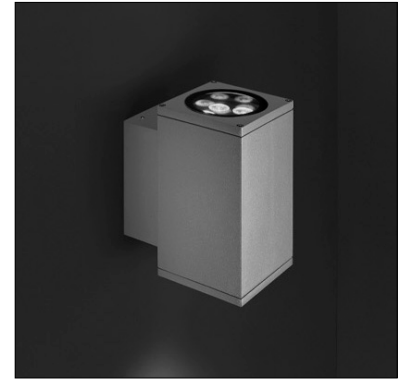

TECHNICAL DATA

Wattage / Input	2 x 8W (120VAC)
Power Supply	Integral
Construction	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass
CCT	3000K, 4000K
BUG Rating	B1-U3-G0
Delivered Lumens	720 lm per beam (3000K, 10°)
Efficacy	90.0 lm/W per beam(3000K, 10°)
Optics	3 Standard, See Below
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	5.51" square x 9.37" h
LED Source	5 x 1.5W CREE "XP-G3" High Power LED up and down
Fixture Weight	6.6 lbs
IP Rating	IP65
IK Rating	IK09

Fixture Dimensions

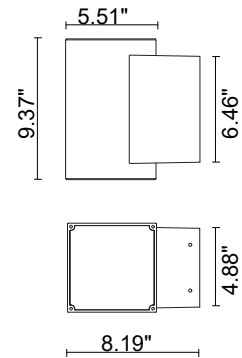

ORDERING INFORMATION

Example: 401006P-30K-10-MB

401006P	-		-		-	
---------	---	--	---	--	---	--

Model No.	CCT	Optics	Finish
401006P	30K - 3000K 40K - 4000K	10 - 10° 30 - 30° 45 - 45°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: all photometry is 3000K

Maximum Candela = 15562.5

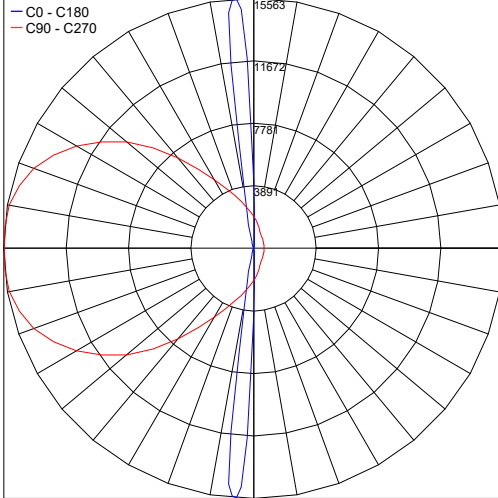

PHOTOMETRIC FILENAME : 401006 TECH MED SQ 10°.IES

Maximum Candela = 1429.3

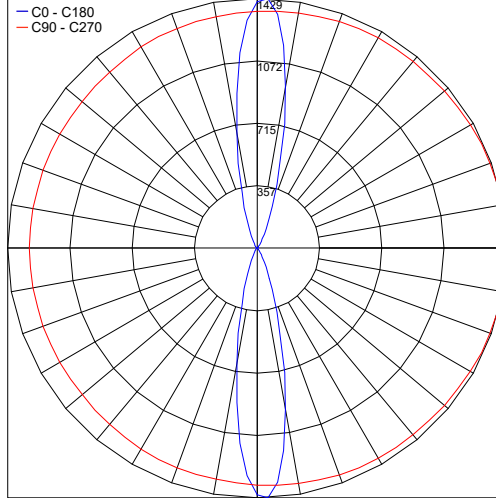

PHOTOMETRIC FILENAME : 401006 TECH MED SQ 30°.IES

Job Name/Date:

Fixture Type Designation: