


The Tube is an indoor suspended pendant with a sleek and minimal design. It has a diameter of only 0.59" making it extremely discrete and elegant in shape. Available in 3000K (2700K on request), and 5 standard finishes.

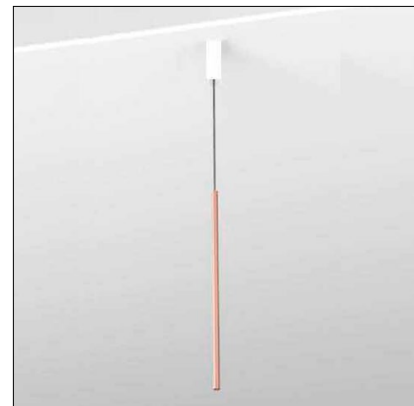


TECHNICAL DATA

Wattage / Input	4.5W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum
CCT	3000K (2700K on request)
CRI	>90
LED Lumens	360 lm (3000K)
Efficacy	80 lm/W (3000K)
Optics	Narrow
Finishes	5 Standard, See Below
Fixture Dimensions	Ø 0.6 x 19.7" I
Cable Length	4.92'
Fixture Weight	1.76 lbs
IP Rating	IP40

Does not require a J-Box

Fixture Dimensions

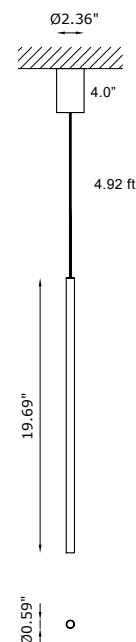

ORDERING INFORMATION

Example: BU1131 WH 4 S 00 M 27 ND.US. Power supplies for remote ordered separately.

BU1131		4 S 00		.US
Model No.	Finish	Optics	CCT	
BU1131	WH - White BL - Black CP - Chromed A1 - Champagne A2 - Rose Gold	4 S 00 - Narrow	M 30 ND - 3000K (standard) M 27 ND - 2700K (on request)	.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2	1-2
PPLT00468	Phase Dim (120V Only)	120VAC to 350mA, 14W, Class 2	2-3
PPLT00168-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-8
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-4

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-2
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	4-4

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 109.8

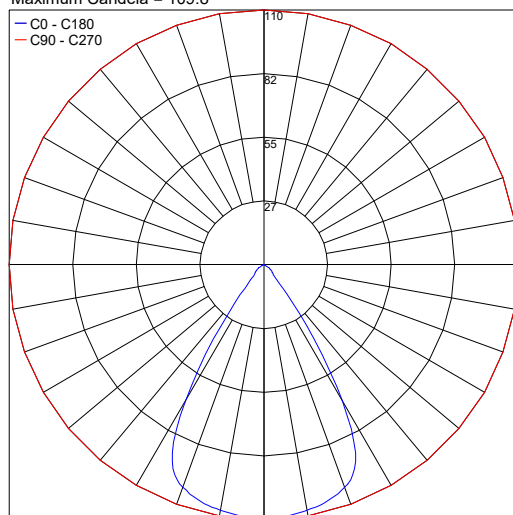

PHOTOMETRIC FILENAME : THE TUBE - BU1131.IES

Job Name/Date:

Fixture Type Designation: