


TOUCH IT 111 IP20

Touch-It 111 IP20 is an indoor recessed downlight with smooth curves that integrate into the architecture making the light radiate from the ceiling. Touch-It is made of Calcyt® plaster and is fully paintable. Available in 2 different sizes and various wattages. IP54 version available.



Ceiling Cut-Out: 15.9" x 15.9"
Fixture Dimensions

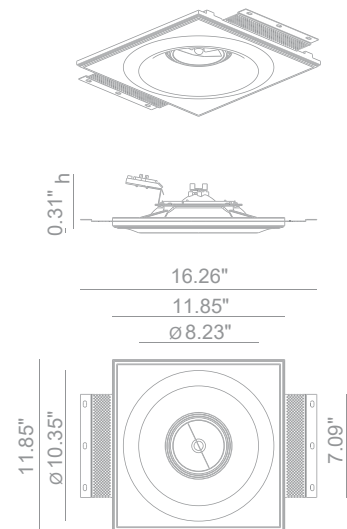

TECHNICAL DATA

Wattage / Input	29.3W (1050mA), 19.5W (700mA) 15.6W (700mA), 22.3W (700mA)
Power Supply	Remote, not included (see page 2)
Construction	Body: CALCYT® plaster
CCT	2700K, 3000K, 4000K
CRI	>97
Delivered Lumens	2427 lm (29.3W version, 3000K, 36°) 1182 lm (22.3W version, 3000K, 36°)
Efficacy	83 lm/W (29.3W version, 36°) 53 lm/W (22.3W version, 36°)
Optics	36° (20° or frosted diffuser on request) (Adjustable 0°-30°)
Finishes	Paintable Plaster
Cut-out Dimension	12.01" x 12.01"
Fixture Dimensions	11.85" x 11.85" w x 0.31" h
Aperature	Ø8.23" (Ø10.35")
LED Source	Xicato LED
Color Consistency	2-Step MacAdam
IP Rating	IP20

ORDERING INFORMATION

Example: 233 03 840. Accessories ordered separately.

Model No.	Description
233 03 940 - 15.6W	2700K, 1300 lm, CRI 97, 700mA
233 03 840 - 15.6W	3000K, 1300 lm, CRI 97, 700mA
233 03 740 - 15.6W	4000K, 1300 lm, CRI 97, 700mA
233 05 940 - 22.3W	2700K, 2000 lm, CRI 97, 700mA
233 05 840 - 22.3W	3000K, 2000 lm, CRI 97, 700mA
233 05 740 - 22.3W	4000K, 2000 lm, CRI 97, 700mA

Model No.	Description


Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

Consult factory

ACCESSORIES - Installation




Standard (included)

Installation system for ceiling 0.35" - 0.47" - 0.59"

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 2067.7

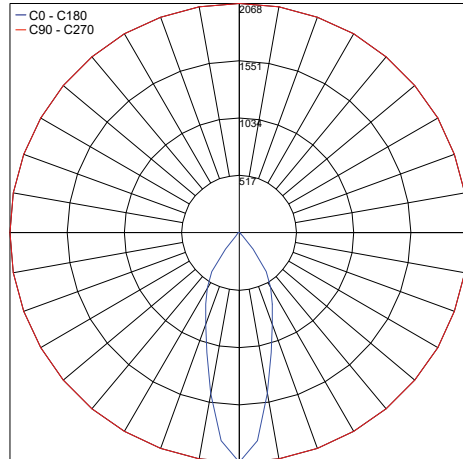


PHOTOMETRIC FILENAME : TOUCH-IT 111 (1300LM, CRI 80).IES

Maximum Candela = 3498.4

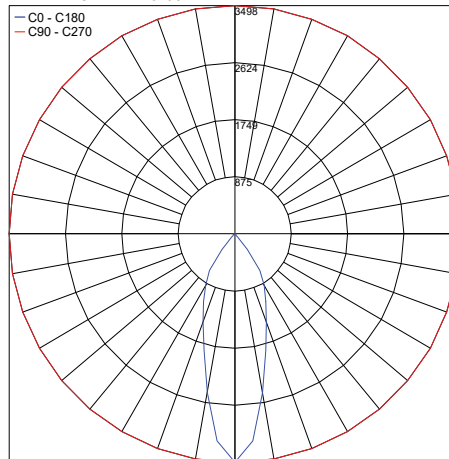

PHOTOMETRIC FILENAME : TOUCH-IT 111 (2000LM, CRI 80).IES

Maximum Candela = 3466.5

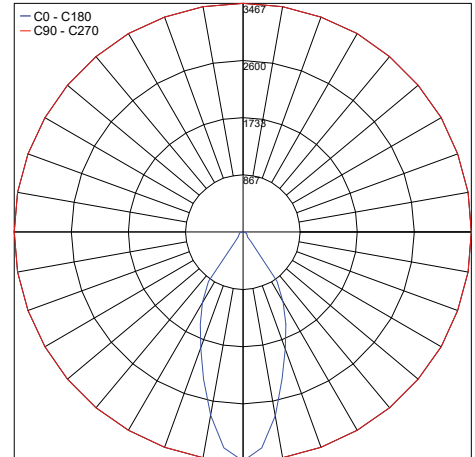

PHOTOMETRIC FILENAME : TOUCH-IT 111 (3000LM, CRI 80) REFLECT 36°.IES

Job Name/Date:

Fixture Type Designation: