


XO is a series of linear pendants that are both functional and decorative and perfectly suited for installation in work or living spaces. The unique structure of the XO allows down light, up-down light or an all sides light. It is available in 3 different length with a variety of finishes.

TECHNICAL DATA

Wattage / Input	14W, 28W, 56W (500mA)
Power Supply	Remote, included.
Dimming	0-10V Dimming
Construction	Body: Aluminum, Veneer Lens: Acrylic Diffuser
CCT	3000K, 4000K
CRI	>90
Delivered Lumens	1505 lm (Downlight - 4000K) 3010 lm (Up-Down - 4000K) 6020 lm (All Sides - 4000K)
Efficacy	53.8 lm/W (Downlight / Up-Down) 71.7 lm/W (All Sides)
Optics	Diffuse
Finishes	Black, White (aluminum) Oak, Umber, Rosewood (veneer)
Fixture Dimensions	27.12" l x 2.75 w x 7.78" max from ceiling
IP Rating	IP20



Fixture Dimensions

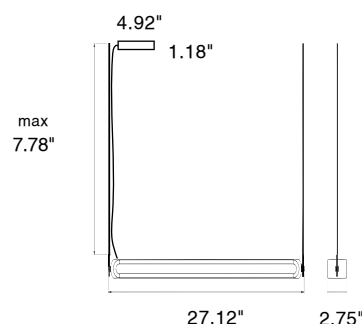

PHOTOMETRIC DATA

Coming Soon

ORDERING INFORMATION

Example: N8134-4.

Model No.	Description
N8134	Downward - 14W - 3000K - Black
N8135	Downward - 14W - 3000K - White
N8134N	Downward - 14W - 4000K - Black
N8135N	Downward - 14W - 4000K - White
N8136	Up Down - 28W - 3000K - Black
N8137	Up Down - 28W - 3000K - White
N8136N	Up Down - 28W - 4000K - Black
N8137N	Up Down - 28W - 4000K - White
FOR VENEER FINISHES on Downlight & Up/Down versions - please add one of the following to the end of code (ex: N8138-3): 1 - Black 3 - Oak 2 - White 4 - Umber 5 - Rosewood	

Model No.	Description
N8138	All Sides - 56W - 3000K - Black
N8139	All Sides - 56W - 3000K - White
N8138N	All Sides - 56W - 4000K - Black
N8139N	All Sides - 56W - 4000K - White

Job Name/Date:

Fixture Type Designation: