

Technical features

IP65 IK09




805009P-805011P


FLASH POLE MEGA

Round pole-mounted floodlight for outdoor installation on a pole diam. 2.36" or 2.99" (pole by others). Phospho-chromatized and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Clamp for pole diam 2.36" or 2.99" included. Built-in LED driver 120VAC 50-60Hz, with 15 CREE XP-G2 high-power LED. IP65 rating.

805009P



805011P

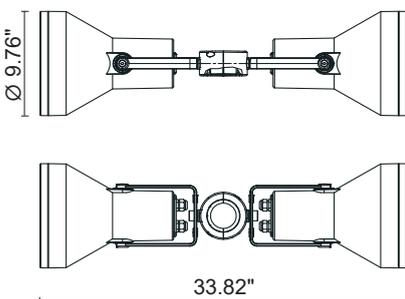

Technical data

IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	9.84 ft. neoprene power cable included



805009P

SINGLE FLASH POLE MEGA - 22W 120VAC 50-60HZ ELECTRONIC

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
--------------	--------------------	-------------------	------------------------

3000°K warm-white

high-power led	 10°	2,160	98.18
high-power led	 30°	2,052	93.27
high-power led	 45°	1,949	88.60

4000°K neutral-white

high-power led	 10°	2,250	102.28
high-power led	 30°	2,137	97.14
high-power led	 45°	2,030	92.27

Colors options

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

 Matte Black
(on request)

Technical data

Wattage 22W

Light source NR. 15 CREE
"XP-G2" LED

Gross weight 12.1 lbs



POLE BY OTHERS

805011P

DOUBLE FLASH POLE MEGA - 2 X 22W 120VAC 50-60HZ ELECTRONIC

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
--------------	--------------------	-------------------	------------------------

3000°K warm-white

high-power led	 10°	2 x 2,160	98.18
high-power led	 30°	2 x 2,052	93.27
high-power led	 45°	2 x 1,949	88.60

4000°K neutral-white

high-power led	 10°	2 x 2,250	102.28
high-power led	 30°	2 x 2,137	97.14
high-power led	 45°	2 x 2,030	92.27

Colors options

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

 Matte Black
(on request)

Technical data

Wattage 2 x 22W

Light source NR. 2 x 15 CREE
"XP-G2" LED

Gross weight 23.1 lbs



POLE BY OTHERS