

**Technical features**



601701P-04P


# SECTOR 380

14.96" height bollard, round shape, for outdoor surface installation, from 1 to 4 light windows, phospho-chromatized and polyester powder coated extruded copper-free aluminum body, opaline tempered glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120VAC 50-60Hz, with NR. 1 x CREE XHP70 LED. IP66 rating.




**Technical data**


IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance extruded copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Screws	Stainless steel
Transformer	Electrical power supply 120VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable:	3.28 foot included
Gross weight	9.92 lbs

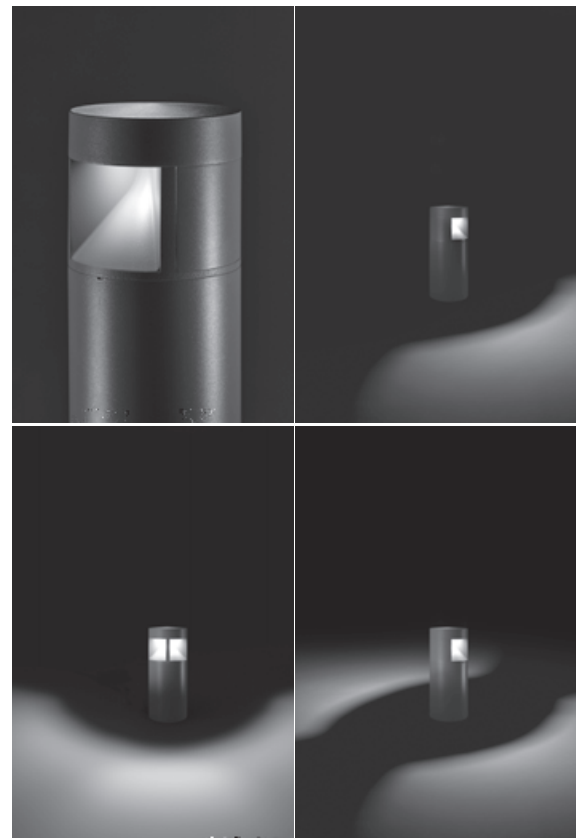

AC053 - Base Plate





601701P	SECTOR 380 01 - 6 WATT 120VAC 50-60 HZ		
light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high power led	90°	533	88.83
<b>4000°K neutral-white</b>			
high power led	90°	550	91.66



#### Colors options

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matte Black (on request)


601702P	SECTOR 380 02 - 12 WATT 120VAC 50-60 HZ		
light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high power led	180° or 90° + 90°	1.067	88.92
<b>4000°K neutral-white</b>			
high power led	180° or 90° + 90°	1.100	91.66



#### Colors options

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matte Black (on request)

601703P	SECTOR 380 03 - 18 WATT 120VAC 50-60 HZ		
light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high power led	270°	1.600	88.88
<b>4000°K neutral-white</b>			
high power led	270°	1.650	91.66



#### Colors options

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matte Black (on request)

601704P	SECTOR 380 04 - 24 WATT 120VAC 50-60 HZ		
light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high power led	360°	2.134	88.91
<b>4000°K neutral-white</b>			
high power led	360°	2.200	91.66



#### Colors options

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matte Black (on request)