



Pillar Mega is a larger version of the IP66-rated, square bollard Pillar, suitable for use in outdoor urban or private installations, that is extremely durable and able to withstand atmospheric agents over time. It is available with a single or double emission head in 2 color temperatures and 5 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	12W - Mono Emission 18W - Mono Emission 2 x 18W - Bi Emission
<b>Power Supply</b>	Remote, not included. Consult Factory.
<b>Construction</b>	Head: Aluminum (Anodized to 18 microns) Pole: Extruded Aluminum Lens: Extra-clear, Tempered, Screen-printed Glass Cable Length: 0.98'
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B1-U2-G1
<b>Delivered Lumens</b>	2040 lm (18W - 3000K)
<b>Efficacy</b>	113.3 lm/W (3000K)
<b>Optics</b>	Road
<b>Finishes</b>	5 Standard, See Below
<b>Fixture Dimensions</b>	7.87" l x 7.09" w x 1.57" h (Mono Head) 12.20" l x 7.87" w x 1.57" h (Bi Head) 7.87" l x 1.97" w x 118.11" h (Pole Height)
<b>Color Consistency</b>	<3-Step MacAdam
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK10

Fixture Dimensions

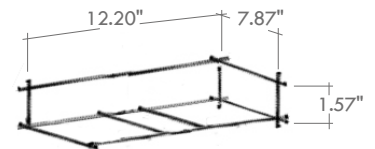

## ORDERING INFORMATION

Example: LM05.104380.US.03.RD.BP. Accessories / Power Supplies ordered separately.

<input type="text"/>	<input type="text"/>	<input type="text" value="RD"/>	<input type="text"/>
<b>Model No.</b>	<b>Finish</b>	<b>Optic</b>	<b>CCT</b>
LM05.104214.US - Mono 18W version	01 - White	RD - Road	BP - 3000K
LM05.104215.US - Bi 2x18W version	02 - Black		BF - 4000K
XXXXX - Mono 12W version	03 - Gray		
	04 - Cor-ten		
	11 - Anthracite		

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

*Consult Factory*

## ACCESSORIES - Installation



**Pole**  
**LM20.104218**  
(7.87" x 1.97" x H118.11")



**Anchor Plate**  
**LM20.170222**  
(6.89" x 11.61" x 11.81" h)


*Job Name/Date:*

*Fixture Type Designation:*

## PHOTOMETRIC DATA


Note: All photometric data is 3000K

Maximum Candela = 799.8

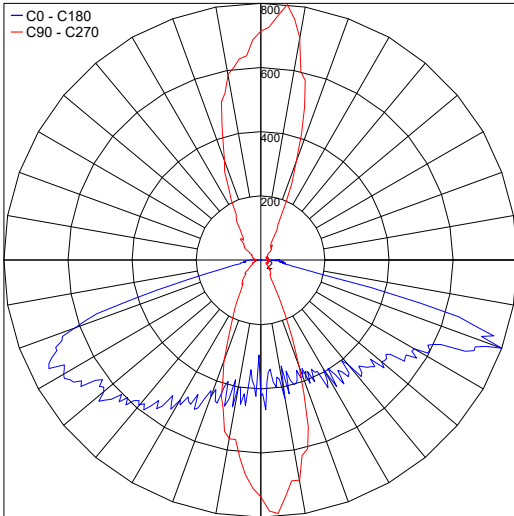

PHOTOMETRIC FILENAME : PILLAR MEGA 3000K LM05.104214.XX.RD.BF.IES

Maximum Candela = 847.7

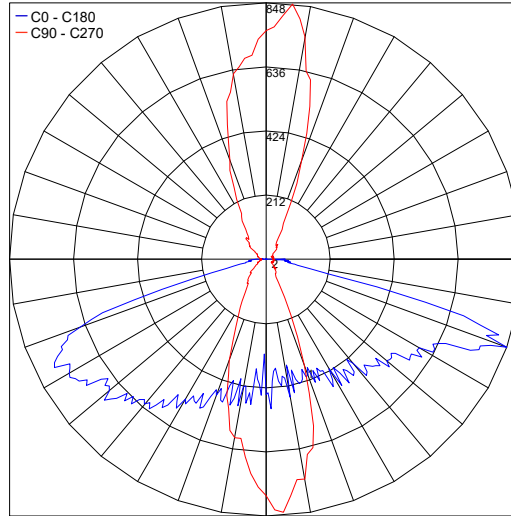

PHOTOMETRIC FILENAME : PILLAR MEGA 4000K LM05.104214.XX.RD.BF.IES

Job Name/Date:

Fixture Type Designation: