


Nine Athena is a minimalist lighting solution, using the Lutron Athena Wireless Node, that offers linear spread upper and diffused lower light emissions. Small details such as no power cord maintain the minimalistic idea without sacrificing function in the field. It is available in 4 foot lengths with multiple color temperature and finish options.

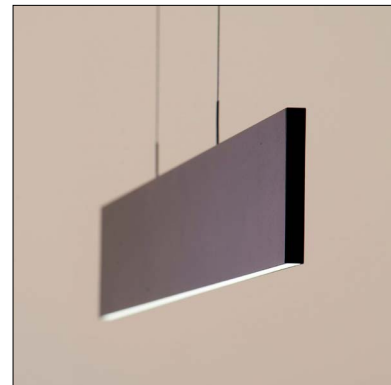

**MADE IN THE U.S.A.**

Fixture Dimensions  
See Drawing on page 2.

**\*Athena Controls by Others**

**Up and Down dim together**  
(Separate Dimming on request)

## TECHNICAL DATA

<b>Wattage / Input</b>	72W (4 ft) (120-277VAC)
<b>Power Supply</b>	Integral (0-10V Dimming) with Athena Wireless Node
<b>Construction</b>	Body: Extruded Aluminum Mounting: Aircraft Cable
<b>CCT</b>	2700K, 3000K, 3500K, 4000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	Up - 1848 lm, Down - 1866 lm (4 ft, 3000K)
<b>Efficacy</b>	Up: 25.6 lm/W, Down: 25.9 lm/W
<b>Optics</b>	Up: Linear Spread, Down: Diffuse
<b>Finishes</b>	4 Standard, See Below.
<b>Fixture Dimensions</b>	See page 2.
<b>LED Source</b>	Mid-Power LEDs
<b>IP Rating</b>	IP20

## ORDERING INFORMATION

Example: D90-A-4-30-P-10-C-SW.

D90-A	-	4	-		-	P	-		-		-	
Model No.	Length	CCT	Body	Finish	Driver	Canopy						
D90-A	4 - 4 foot	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	P - Pendant	02 - Black Suede 18 - Textured Bronze TS - Silver 11 - White Suede 99 - Custom	C - 120-277VAC, 0-10V Dimming	RC - Recessed* SC - Surface*  RW - Recessed, White SW - Surface, White AS - Surface Acoustical Tile*  AW - Surface Acoustical Tile, White  * Same finish as fixture - Other color on request -						


**NOTE:** AS & AW utilize a rosette mounting pattern to allow direct mounting to a junction box that will hold a minimum of 50 lbs.

Job Name/Date:


Fixture Type Designation:

## FIXTURE DIMENSIONS

### 4 foot version

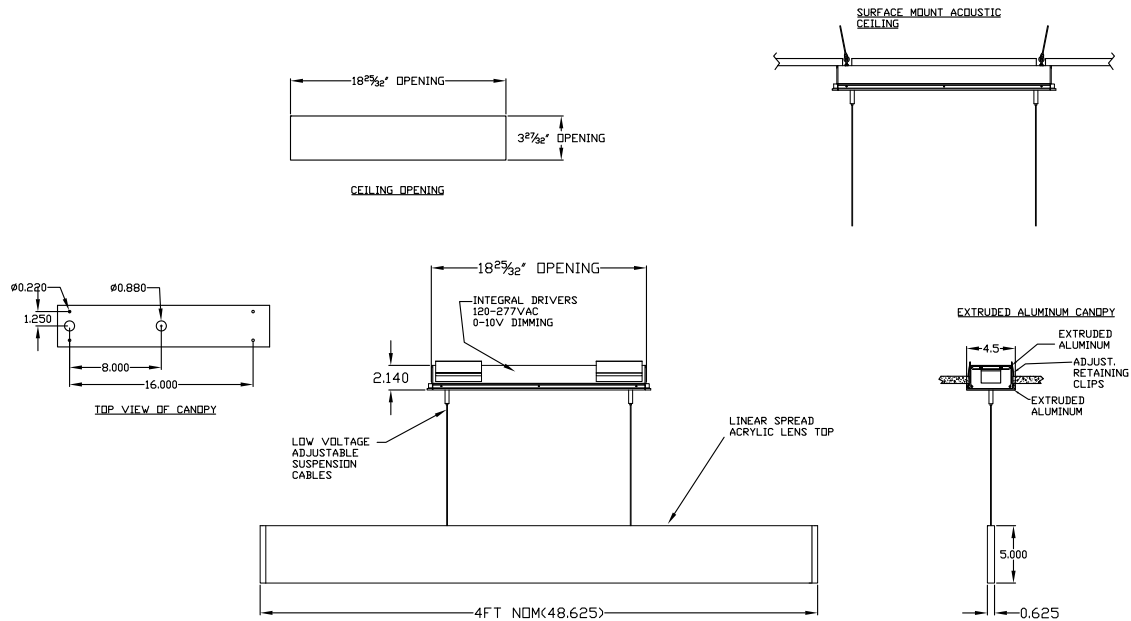

## ATHENA NODE PLACEMENT

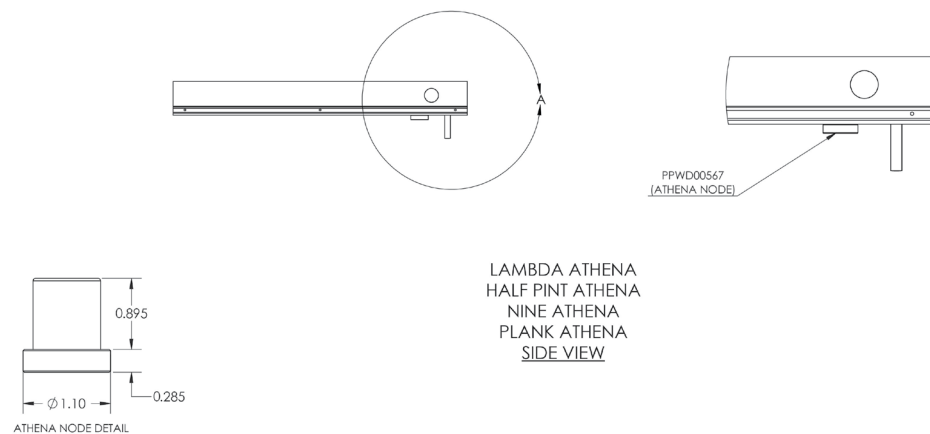


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

*Note all Photometry is 3000K*

Maximum Candela = 913

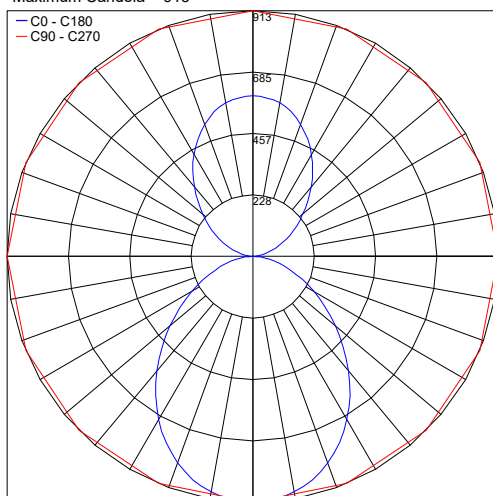

Job Name/Date:

Fixture Type Designation: