


FIXED B-03


FIXED is a stainless steel, IP66-rated, wall mounted LED luminaire with clean lines and a compact design that is suitable for outdoor installation. It is available in mono or bi light emission, with one, two or three LEDs, and 3 standard Hard Coat Treatment finishes. FIXED B-03 is the 2 x 15W (3 Up / 3 Down LEDs) triple, bi light version.



TECHNICAL DATA

Wattage	2 X 15W
Power Supply	Remote 350mA - See page 2
Construction	Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.16" Thick
CCT	2700K, 3000K, 4000K
CRI	>80
BUG Rating	B2-U5-G0 (21°, 3000K) B1-U5-G0 (45°, 65°, 3000K)
Delivered Lumens	550 lm per beam (3000K)
Efficacy	110 lm/W per beam (3000K)
Optics	21°, 45°, 65°, Asymmetric, Road
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	4.7" h x 2.4" w x 7.9" l (B Series)
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions



Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes *Inox Natural*, *Inox Graphite* and *Inox Bronze*. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products *anti-fingerprint* and *anti-stain*.

ORDERING INFORMATION

Example: SPT4026034G.US. Power Supplies / Accessories sold separately.

SPT40260				.US
Model No.	CCT	Optics	Finishes	
SPT40260 (B03)	2 - 2700K 3 - 3000K 4 - 4000K	2 - 21° 4 - 45° 6 - 65° 7 - Asymmetrical 8 - Road Optics	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

FINISHES



Inox Natural



Inox Graphite



Inox Bronze

FIXED B03

SUGGESTED POWER SUPPLIES


350mA - Bi Emission

Part Number	Description	Input/Output	# of Fixtures - B03
PPLT00280	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-1


For other power supply options consult factory.

PHOTOMETRIC DATA


Note: All photometric data is 3000K

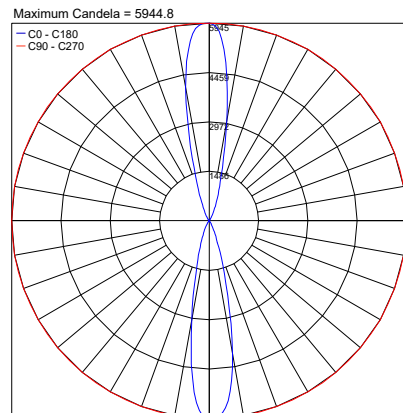

21°

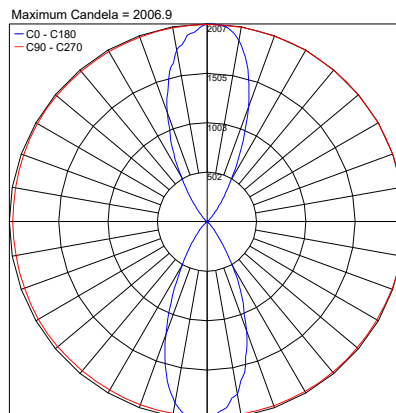

45°

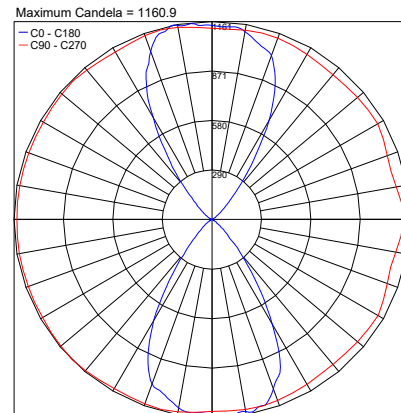

65°

Job Name/Date:

Fixture Type Designation: