

KHORI D-70


Khori is an IP66-rated bollard made of stainless steel with 360° light emission that is perfect for lighting pathways and gardens. It is available in 2 versions, pole diameter of 1.6" or 2.8", and 4 different heights in each version, and 3 Hard Coat Treatment finishes. Khori D-70 is the 2.8" pole diameter version. Dark Sky compliant for output below 80°.



TECHNICAL DATA

Wattage / Input	7W
Power Supply	Integral 120VAC
Dimming	On/Off Only
Construction	Body: AISI 316L Stainless Steel Lens: Transparent Polycarbonate
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U1-G0 (3000K)
CRI	>85
Delivered Lumens	353 lm (3000K) Dark Sky compliant, output below 80°
Efficacy	50.4 lm/W
Optics	360° (Rotosymmetrical)
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	Head: Ø2.8" Ø2.8" Pole x 11.8", 19.7", 27.6" or 35.4" (D-70)
IP Rating	IP66
Impact Resistance	IK07
Warranty	10 Years Against Corrosion 5 Years on Electrical Components

Fixture Dimensions

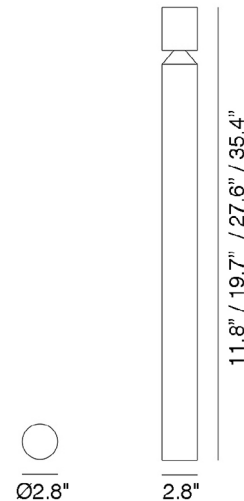

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

ORDERING INFORMATION


Example: SPT6077375B.US. Power Supplies / Accessories sold separately.

SPT6077		7			.US
Model No.	CCT	Optics	Height	Finishes	
SPT6077 (D-70)	2 - 2700K 3 - 3000K 4 - 4000K	7 - 360°	3 - 11.8" 5 - 19.7" 7 - 27.6" 9 - 35.4"	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US


Job Name/Date:

Fixture Type Designation:

ACCESSORIES




PT68000
Flange with 4 Anchor Bolts
for KHORI
(REQUIRED)



PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 144.2

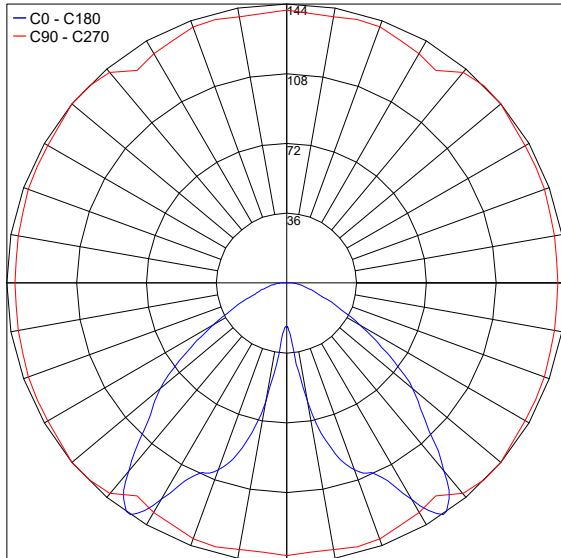

PHOTOMETRIC FILENAME : KHORI D-70 30CM - PT6074373N.IES

Job Name/Date:

Fixture Type Designation: