


M1 is a suspended indoor monopoint suitable for installation on ceilings. It is suspended on a pole with the floodlight being adjustable up to 360°, which allows the luminescent beam to be directed towards details within the space. Available in 22° or 50° optics and 2 standard finishes.

TECHNICAL DATA

Wattage / Input	6W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum
CCT	3000K (2700K, 4000K on request)
CRI	>90
BUG Rating	B1-U1-G0 (22°, 3000K)
Delivered Lumens	452 lm (3000K)
Efficacy	75.3 lm/W
Optics	22°, 50°
Finishes	White or Black
Fixture Dimensions	34.6" l x Ø1.2" - Mount Box 3.1" Sq. (Remote)
Fixture Weight	1.65 lbs
IP Rating	IP40



Fixture Dimensions

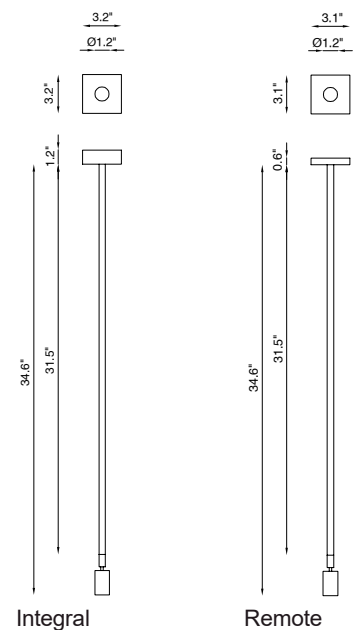

ORDERING INFORMATION

Example: BU1502.BL.2S.22.E.30.WD.US. Power Supplies ordered separately.

BU1502		2S		E		WD	US
Model No.	Finish		Optics		CCT	Power Version	
BU1502 - Remote Version	WH - White BL - Black	2S	22 - 22° 50 - 50°	E	27 - 2700K 30 - 3000K 40 - 4000K	WD - Remote	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 10W, Class 2	1-1
PPLT00469	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	2-2
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 30W, Class 2, DAMP	1-4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-4

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	1-1
PPLT00676	PEQ0E	PEQ0	100%-0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ LED Driver	120-277VAC to 500mA, 20W, Class 2	2-3
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	4-4

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 1874.3

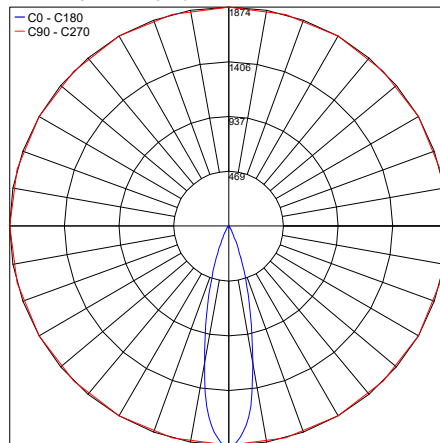

PHOTOMETRIC FILENAME : M1 - BU1501XX2230.IES

Job Name/Date:

Fixture Type Designation: