


# ORIS IP65



Oris IP65

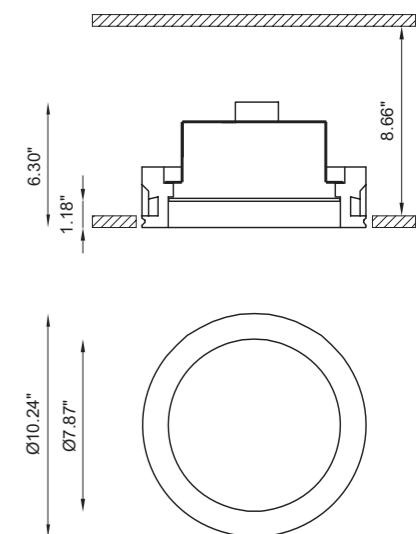

## TECHNICAL FEATURES

Code	BU5381.CW	BU5388.CW
Type	Downlight 90°	Downlight 90°
Material	CW: Coral WaterOut® I waterproof	CW: Coral WaterOut® I waterproof
Weight	8.82 lbs	8.82 lbs
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65
Control gear	Remote driver (included)	Remote driver (included)
Cut out for plasterboard	Ø 10.63 in	Ø 10.63 in
Lamp type	LED 1050mA	LED 350mA
Lamp wattage	1 × 40W	2 × 6.5W
Luminous efficacy	1 × 4680 lm - 3000K	2 × 810 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 120°
Fitting	-	-
Light colour	White 3000K	White 3000K
Light hole	Ø 7.87 in	Ø 7.87 in
Voltage connection	50/60Hz	50/60Hz
CRI	>90	>90
Note	Extra white satin glass. Frosted glass recessed 1.18 in into the ceiling.	Extra white satin glass. Frosted glass recessed 1.18 in into the ceiling.
	Other available light colors: 2700K (on request), 4000K (on request).	Trailing-edge and leading-edge dimming (20 - 100%).
		Other available light colors: 2700K (on request), 4000K (on request).

## OPTIONAL

Brick box	-	cod. BR5388LT
-----------	---	---------------

designplan®

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042