

SPY MAXI

SPY is a versatile outdoor floodlight, also available as a downlight, that comes in three sizes (Mini, Medium and Maxi) and is 350° rotatable, for fulfilling every lighting situation. It has optics set back from the edge of the main body to allow precision without glare. Also available in a 'treehugger' version which can be secured to branches, poles or other supports. Spy Maxi is the largest version with a 3.6" diameter, and 15W or power.



DOWNLIGHT



FLOODLIGHT



FLOODLIGHT ON POLE



TREEHUGGER

Fixture Dimensions - see page 2

TECHNICAL DATA

Wattage	15W
Power Supply	Integral 120VAC
Construction	Body: 6026 Anticorodal Aluminum Bracket: Stainless Steel Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U0-G0 (3000K)
CRI	>80
Delivered Lumens	1123 lm (3000K)
Efficacy	74.9 lm/W
Optics	16°, 24°, 60°
Finishes	Pure White (RAL 9010) Alu Gray (RAL 9006) Dark Brown
Lumen Maintenance	40,000 hrs (Ta 35°C)
Fixture Dimensions	Ø3.62" x 5.37" (downlight) Ø3.62" x 11.71" h x 2.56" base (floodlight) Ø3.62" x 11.71" h x 2.56" base (on pole) Ø3.62" x 6.59" h - 1.81" x 2.36" base (treehugger)
IP Rating	IP66
Impact Resistance	IK08

ORDERING INFORMATION


Example: F43145.4.3.12.US. Power Supplies ordered separately.

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	.US
Model No.	Finish	CCT	Optics		
F23144 - Downlight	2 - Pure White (RAL 9010)	2 - 2700K	55 - 16° Spot		.US
F43147 - Flood	4 - Alu Gray (RAL 9006)	3 - 3000K	12 - 24° Medium		
F43145 - Flood Pole	8 - Dark Brown	4 - 4000K	56 - 60° Wide		
F43146 - Treehugger					


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

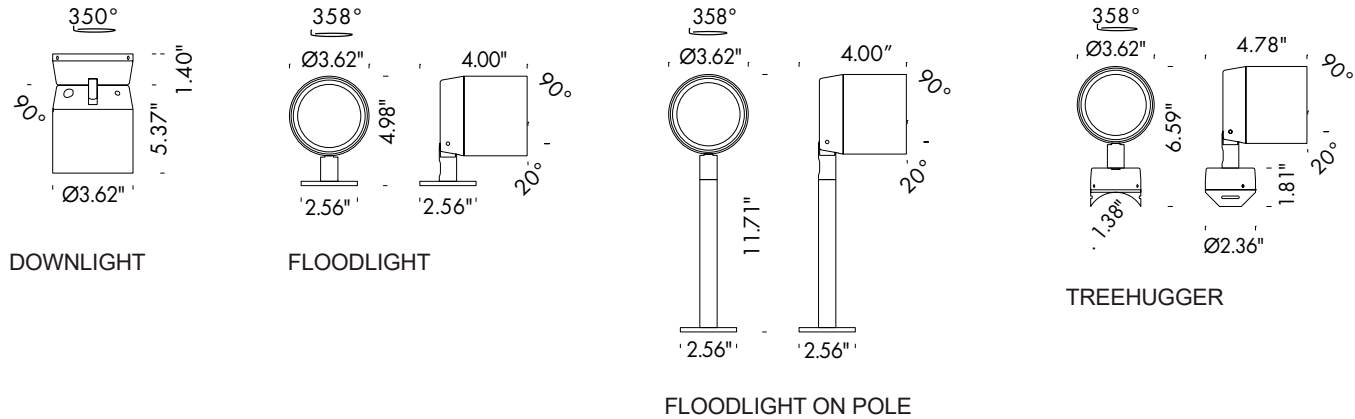


ACCESSORIES

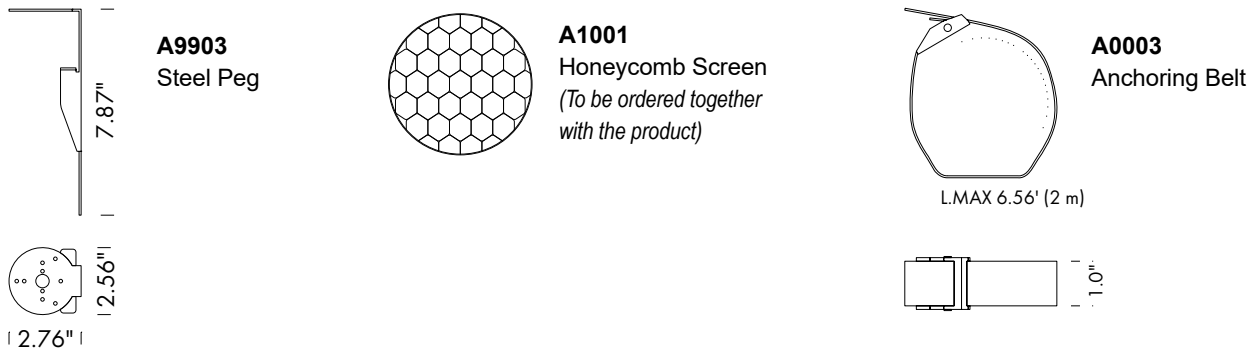

PHOTOMETRIC DATA

Note all Photometry is 3000K

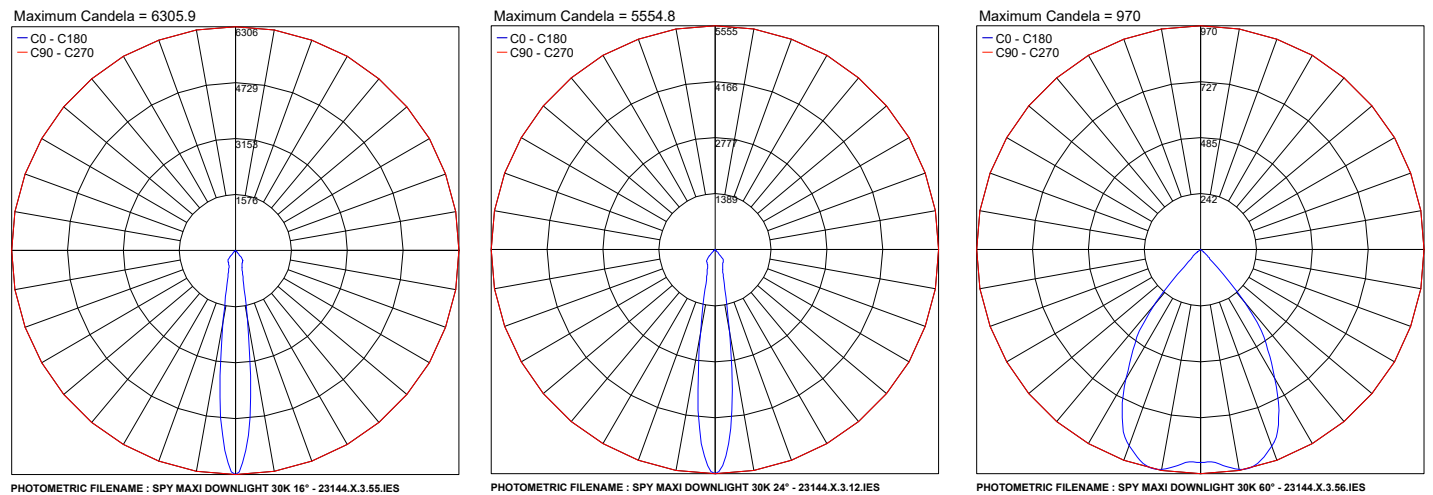

Job Name/Date:

Fixture Type Designation: