

NAIL is a circular pole top made of die-cast and turned aluminum, that is characterized by a clean and essential line, suitable for outdoor installation. It has a diameter of 9.8" with the option of transparent or sandblasted glass lens, 2 diameter pole connectors, and 3 standard finishes. Dark Sky compliant for output below 80°.



TRANSPARENT GLASS




SANDBLASTED GLASS

TECHNICAL DATA

Wattage	25W (Sandblasted Glass) 40W (Transparent Glass)
Power Supply	Integral 120VAC
Construction	Head/Base: Die-Cast/Turned Aluminum Lens: Transparent or Sandblasted Glass
CCT	3000K
BUG Rating	B1-U2-G1 (Sandblasted Glass) B3-U2-G1 (Transparent Glass)
CRI	>80
Delivered Lumens	2330 lm (3000K) Dark Sky compliant, output below 80°
Efficacy	105.9 lm/W (3000K)
Optics	Diffused
Finishes	3 Standard, See Below
Fixture Dimensions	Ø9.8" x 1.4" Connector: 11.0" / 22W, 12.6" / 36W Pole Diameter: Ø2.36" or Ø2.99" Pole Heights: Ø2.99" - 157.5" (19.7" in-ground) Ø2.36" - 47.2", 63.0", 102.4" (19.7" in-ground)
IP Rating	IP65
Impact Resistance	IK07

Fixture Dimensions

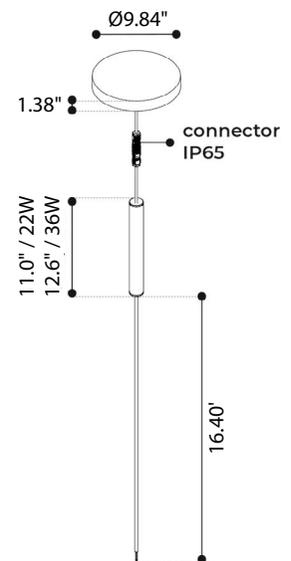

ORDERING INFORMATION


Example: D902111034.US Poles ordered separately - see page 2.

D9021			US
Model No.	CCT	Finish	US
D9021	1100 - Ø2.36", 30°, 40W, Transparent 1101 - Ø2.36", 130°, 40W, Transparent 1102 - Ø2.36", 150°, 40W, Transparent 1103 - Ø2.99", 30°, 25W, Transparent 1104 - Ø2.99", 130°, 25W, Transparent 1105 - Ø2.99", 150°, 25W, Transparent 1106 - Ø2.36", Diffuse, 25W, Sandblasted	2 - White 3 - Sand 4 - Graphite	US

Job Name/Date:

Fixture Type Designation:

POLES

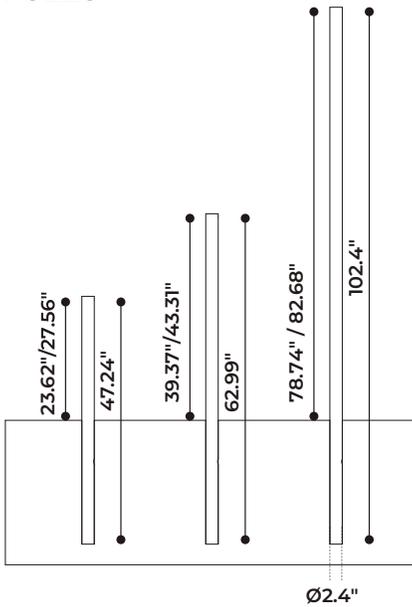

D90672 - White

D90673 - Sand

D90674 - Graphite

Pole - Ø2.36" x 47.24"

D90692 - White

D90693 - Sand

D90694 - Graphite

Pole - Ø2.36" x 102.36"

D90622 - White

D90623 - Sand

D90624 - Graphite

Pole - Ø2.99" x 157.48"

D90682 - White


D90683 - Sand

D90684 - Graphite


Pole - Ø2.36" x 62.99"

PHOTOMETRIC DATA

Note: All photometry is 3000K

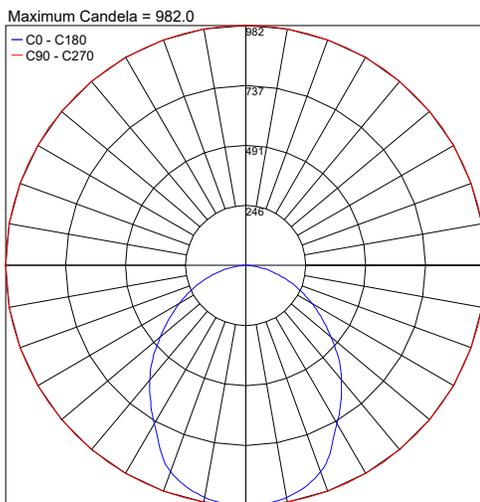

PHOTOMETRIC FILENAME : NAIL 3000K-DIFFUSED-22W-SAND-BLASTED.JIES

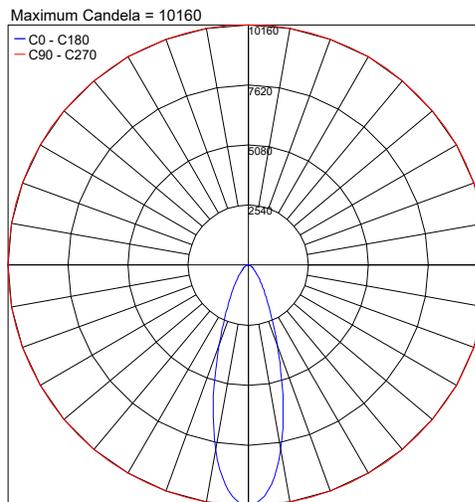

PHOTOMETRIC FILENAME : NAIL 3000K-30°-36W-TRANSPARENT-GLASS.JIES

Job Name/Date:

Fixture Type Designation: