

CUP BOLLARD - Ø2.8" Pole


CUP is a collection designed by Giuseppe Maurizio Scutellà that includes a wall mount, bollard and pole mounted version with an efficient, cylindrical, minimalist design, ready to be installed outdoors on different types of pole or the wall. It is available with 180° or 360° light beam, and 2 standard finishes. CUP BOLLARD Ø2.8" Pole comes in 2 heights, with 5W or 7W. Dark Sky compliant for output below 80°.



F63501 / F63502



F63507 / F63508

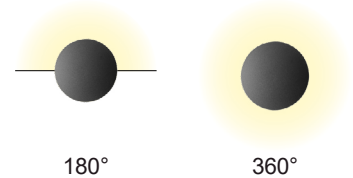

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage	5.4W (180°, h 10.71") 5.2W (360°, h 10.71") 7.6W (180°, h 23.70") 7.4W (360°, h 23.70")
Power Supply	Integral 120VAC
Construction	Housing: Die-cast Aluminum Lens: Extra Clear Tempered Glass
CCT	2000K, 3000K, 4000K
BUG Rating	—
CRI	>80
Delivered Lumens	440 lm (3000K, 180°, h 10.71") 435 lm (3000K, 360°, h 10.71") 605 lm (3000K, 180°, h 23.70") 595 lm (3000K, 360°, h 23.70") Dark Sky compliant, output below 80°
Efficacy	81.5 lm/W (3000K, 180°, h 10.71") 83.7 lm/W (3000K, 360°, h 10.71") 79.6 lm/W (3000K, 180°, h 23.70") 80.4 lm/W (3000K, 360°, h 23.70")
Optics	180°, 360°
Finishes	Anthracite, Gray Aluminum
Lumen Maintenance	L80, B10, 41,000 hrs (Ta 40°C)
Fixture Dimensions	See page 2
IP Rating	IP66
Impact Resistance	IK10

ORDERING INFORMATION

Example: F63501.1.2.64.US. Accessories ordered separately.


<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Model No.	Finish	CCT	Optics	<input type="text"/>	<input type="text"/>
F63501 (ON/OFF - 10.7" h)	1 - Anthracite	2 - 2700K (on request)	64 - 180°	<input type="text"/>	<input type="text"/>
F63502 (DALI - 10.7" h)	4 - Gray Aluminum	3 - 3000K	67 - 360°	<input type="text"/>	<input type="text"/>
F63507 (ON/OFF - 23.7" h)		4 - 4000K		<input type="text"/>	<input type="text"/>
F63508 (DALI - 23.7" h)				<input type="text"/>	<input type="text"/>

Job Name/Date:


Fixture Type Designation:

CUP BOLLARD - Ø2.8" Pole


FIXTURE DIMENSIONS

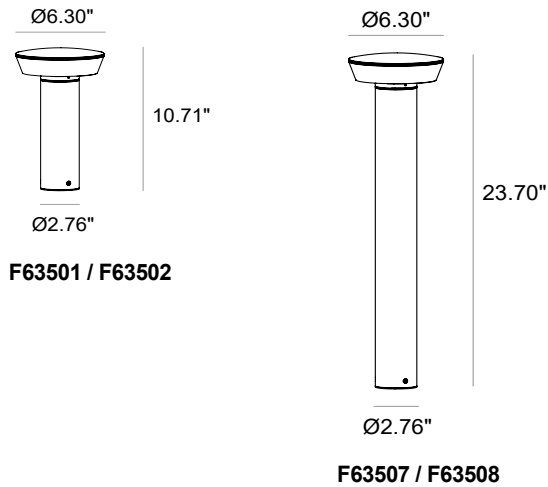

ACCESSORIES - Installation / Light Pollution




A9947
Flange for concrete
(Bollard Ø2.76")



A9949
Anti-lighting pollution cover
for gray aluminum finishing
(Bollard Ø2.76" / 3.94")

SUGGESTIONS FOR BOLLARD INSTALLATION

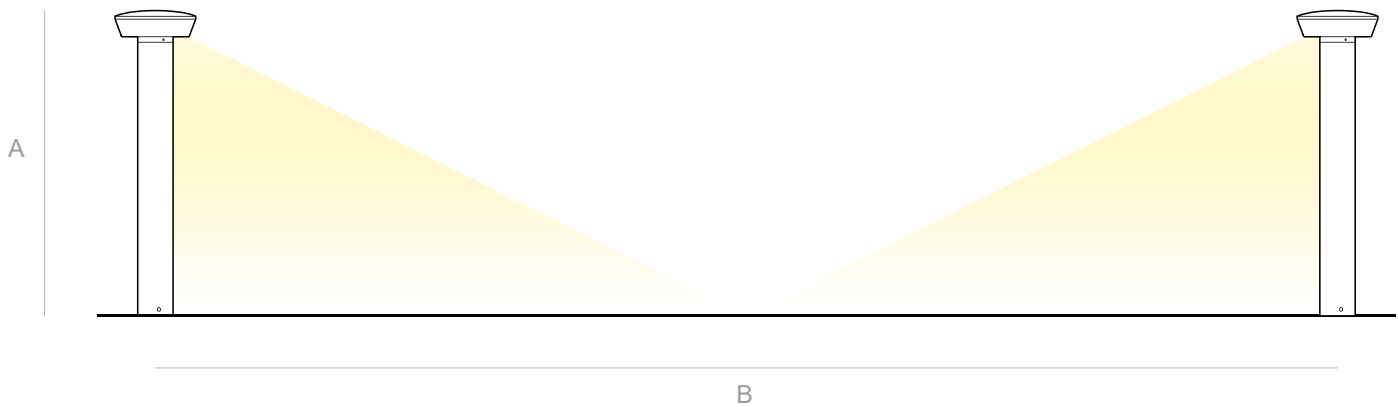

Emission 180°

A = 2.95'	B = 14.11'	2.0 fc
A = 8.20'	B = 36.09'	1.6 fc

Emission 360°









A = 2.95'	B = 15.09'	1.9 fc
A = 8.20'	B = 28.87'	1.4 fc

Job Name/Date:

Fixture Type Designation:

CUP BOLLARD - Ø2.8" Pole

PHOTOMETRIC DATA - Note: All photometry is 3000K

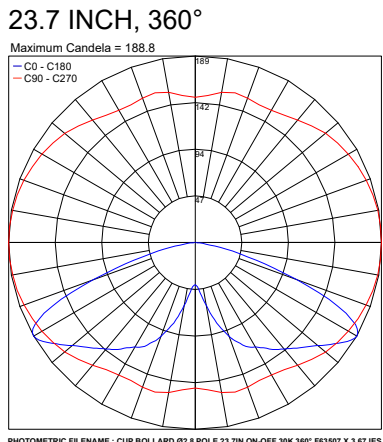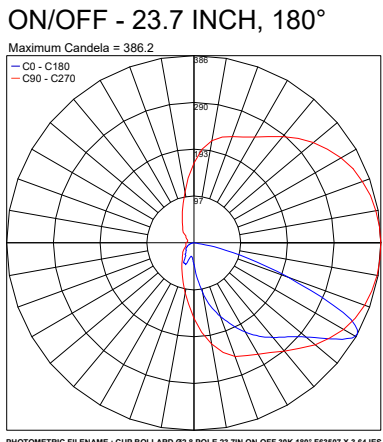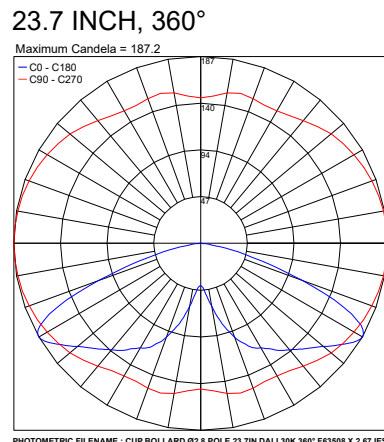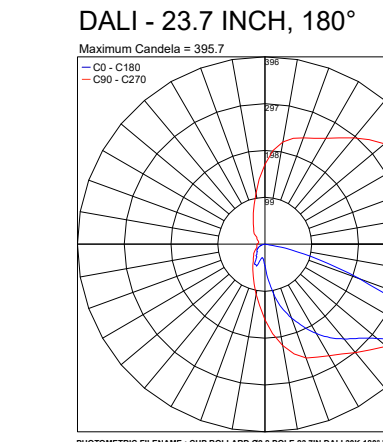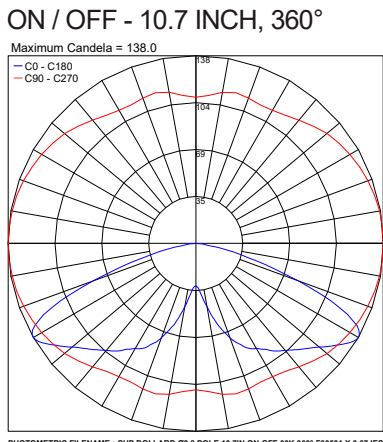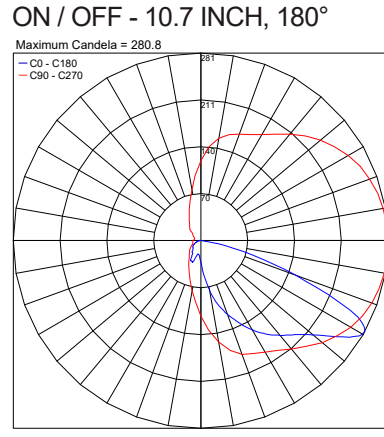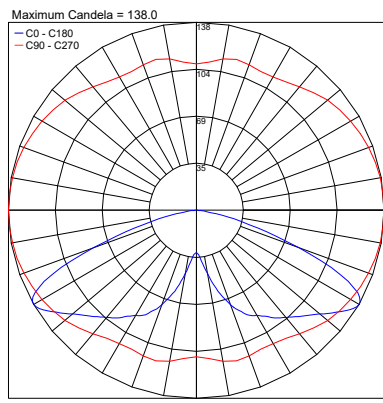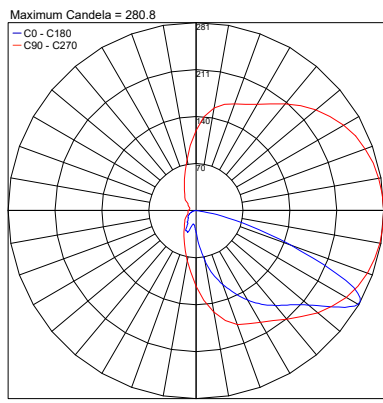

Job Name/Date:

Fixture Type Designation: