

FLEA UNDERWATER RGBW

FLEA is a family of IP67-rated round or square recessed wall / in-grade or downlights available in static white, RGBW, and and underwater version (IP68). FLEA Underwater RGBW is IP68-rated, and offered round (Ø2.0") or as a floodlight (Ø1.5") with RGBW light, 2 optics options, and made of AISI 316L Stainless Steel.



FLEA Underwater Round RGBW



FLEA Underwater Spot RGBW

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage	8W
Power Supply	Remote Fountain/Pool Approved 24VDC Power Supply, not included. See page 2.
Construction	Housing: Anticorodal Aluminum Lens: Extra Clear Tempered Glass
CCT	RGBW
BUG Rating	—
Delivered Lumens	211 lm: (R) 28 lm, (G) 70 lm, (B) 17 lm, (W) 96 lm (6500K)
Efficacy	26.4 lm/W: (R) 3.5 lm/W lm, (G) 8.8 lm/W, (B) 2.1 lm/W, (W) 12 lm (6500K)
Optics	30°, Diffuse
Finishes	AISI 316L Stainless Steel
Lumen Maintenance	90,000 hrs, L90 (Ta 35°C)
Fixture Dimensions	See page 2
IP Rating	IP68 (9.84 ft)
Impact Resistance	—

ORDERING INFORMATION


Example: F50115.6.5.02.US. Power Supplies / Accessories ordered separately.

	6	5		US
Model No.	Finish	CCT	Optics	
F50115 - Round	6 - AISI 316L Stainless Steel	5 - RGB+W	02 - Medium 30°	US
F50135 - Spot			05 - Diffuse	

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

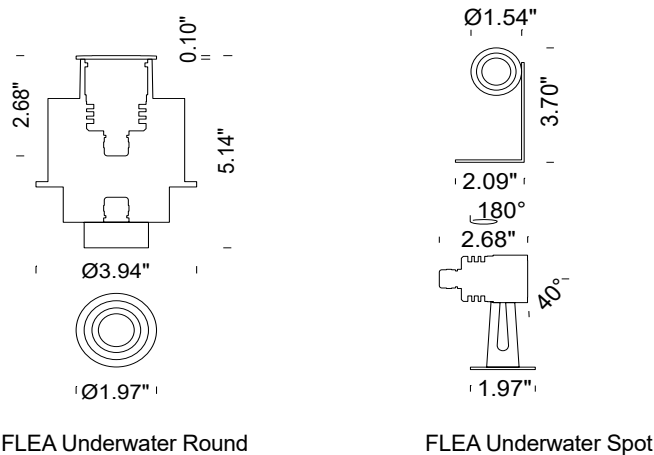

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
FPV-100EL0024	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X	1-10

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: