designplan@

4.2W, Remote 12VDC installation instructions



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS. READ ALL INSTRUCTIONS. IMPORTANT SAFETY INSTRUCTIONS. SAVE THESE INSTRUCTIONS.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION! Please read all instructions before installation.

- Keep these instructions for future reference.
- Must be installed by a qualified electrician in accordance with national and local standards. Designplan is not responsible for fixtures installed without regard to these standards.
- Unauthorized alterations or tampering of product voids warranty.
- The main power connection must be in accordance with local electrical codes.
- Suitable for OUTDOOR applications.





Electrical Connections:

- LED lights must be **connected in parallel** respecting polarities.
- CHOOSE POWER SUPPLY ACCORDINGLY. Please consider the voltage through which fixtures are fed as well as the max power consumption.
- Connect power only if all the fixtures are connected.
- The power supplies MUST be installed in aerated rooms, far from heat sources. Overworking or lack of air circulation will not permit natural dissipation.
- Use only Class 2 type electronic power supply.
- Never use switches on secondary circuit.

ATTENTION: Contractor MUST use gel-filled wire nuts.


Maintenance

Scheduled maintenance must be carried out once a year on all lighting devices, regardless of appliance class and type of use. It must include the following operations:

- Periodically clean fixtures to remove dirt from gratings and screw heads.
- Check tightness of screws on various parts of the device.
- Check that all cable glands and cables are intact and tight. Check that the glass or plastic lens is intact, and replace it if broken or damaged.
- The internal components such as the ballast, driver, washers and screws must not show clear signs of oxidation or rust. Clear traces of rust and oxidation will indicate the presence of water inside the device.
- In the case of damage, the components must be replaced by original components or spare parts.

4.2W, Remote 12VDC


installation instructions

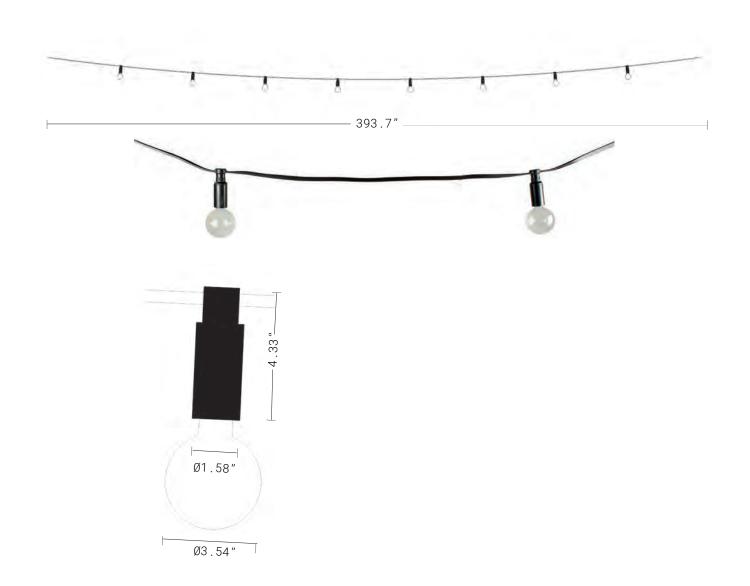


installation instructions

ASSEMBLY INSTRUCTION


switch off the mains supply before starting the installation



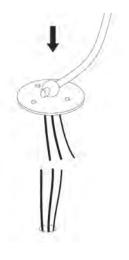


1. do the wiring respecting +/- polarity, heated the joints to make it watertight, connect the yellow/ green ground wire





2. secure the plate to the around using appropriately dimensioned rawplugs.
The size of rawplugs depends on the specific installation and that's the installer's responsability.





P: 908-996-7710




designplan@

4.2W, Remote 12VDC installation instructions

Wiring Diagram

Multiple Fixtures Connection in Parallel:

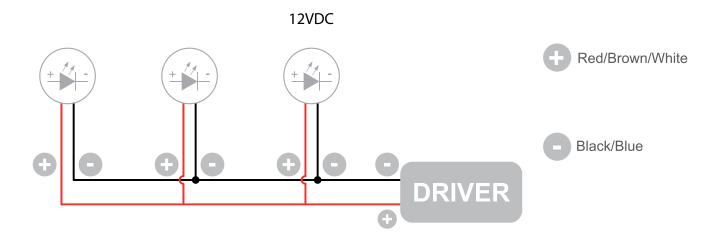



The individual lamps must be connected in parallel. Only power up the system once all the lamps have being connected.

- Only power up the system once all the lamps are connected. Connecting an individual lamp to an active power supply may cause the lamp to break due to over-voltage.
- Lamps and power supply units must be installed in well-ventilated boxes or locations to allow a natural heat diffusion and avoid the devices overheating.
- On the power system, install a surge protection device to reduce the intensity of any voltage spikes to protect the lighting fixtures from the risk of damage.
- Fixture NOT suitable for covering with thermally insulating material.