



Nami 23 is a unique, suspended linear profile made of aluminum that has a minimalist look and refined details designed for painting. It comes in four lengths, 39.4", 78.7", 118.1", or 159.5", with 8 standard finishes and convenient mounting.

## TECHNICAL DATA

<b>Wattage</b>	18W per 3.28 ft (1 m)
<b>Power Supply</b>	Remote 24VDC, not included. See page 2
<b>Construction</b>	Body: Aluminum Diffusers: PMMA (Acrylic)
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	85
<b>Delivered Lumens</b>	2034 lm per 3.28 feet (3000K)
<b>Efficacy</b>	113 lm/W
<b>Optics</b>	LED Tape, Field Cuttable (See page 2)
<b>Finish</b>	8 Standard, See Below
<b>Fixture Dimensions</b>	Length: 39.37", 78.74", 118.11", or 159.45" MAX LED Width: 0.91"
<b>IP Rating</b>	IP20

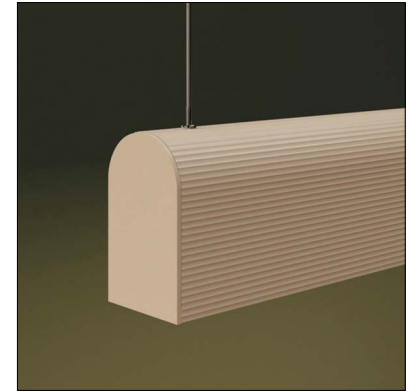

Fixture Dimensions

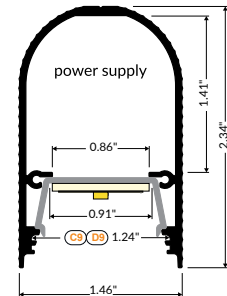

## ORDERING INFORMATION

Example: K1000197.US and K1000520.US. LED Tape / Accessories ordered separately.

Model No.	Length	Finish	
K1			.US
K1	0001 - 39.37"	01 - White Painted	.US
	0002 - 78.74"	21 - Black Anodized	
	0003 - 118.11"	00 - Raw Aluminum	
	0004 - 159.45"	97 - Titanium Blue	
	<i>NOTE: Lengths 118.1" and 159.5" not available in Titanium Blue, Slate Pink, Almond Beige, and Medium Black.</i>	95 - Slate Pink	
		96 - Almond Beige	
		94 - Medium Black	
		20 - Anodized (Complementary Profile)	
<i>NOTE: Codes 0005, 0006, 0007, and 0008 only available for complementary profile in Anodized finish. Order along with profile.</i>			

Job Name/Date:

Fixture Type Designation:

## FINISHES



White Painted



Black Anodized



Raw Aluminum



Titanium Blue



Slate Pink



Almond Beige




Medium Black



Anodized  
Complementary Profile

## LED TAPE

24VDC - Field Cuttable



**PPLL00622** – 2700K

**PPLL00623** – 3000K

**PPLL00624** – 4000K

16.40' l x 0.4" w

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00481</a>	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1
<a href="#">PPLT00690</a>	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-1
<a href="#">PPLT00691</a>	Non-Dim	120-277VAC to 24VDC, 60W, Class 2, IP67	1-2
<a href="#">PPLT00709</a>	ELV / TRIAC & 0-10V to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-4
<a href="#">PPLT00158</a>	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-4
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

### Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00273</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
<a href="#">PPLT00530</a>	L3D0E / L3D03W	L3D0	100% to 0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ or 3-Wire LED F2B Driver	120-277VAC to 24VDC, 96W, Class 2	1-4

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### End Caps



**K19998\_\_**  
End Cap NAMI23  
**01** - White  
**02** - Black  
**22** - Gray




**K19999\_\_**  
End Cap NAMI23-D9  
**01** - White  
**02** - Black  
**22** - Gray



**K19996\_\_**  
End Cap NAMI23 Metal  
**01** - White  
**02** - Black  
**22** - Inox  
**97** - Titanium Blue  
**95** - Slate Pink  
**96** - Almond Beige  
**94** - Medium Black



**K19997\_\_**  
End Cap NAMI23-D9 Metal  
**01** - White  
**02** - Black  
**22** - Inox  
**97** - Titanium Blue  
**95** - Slate Pink  
**96** - Almond Beige  
**94** - Medium Black

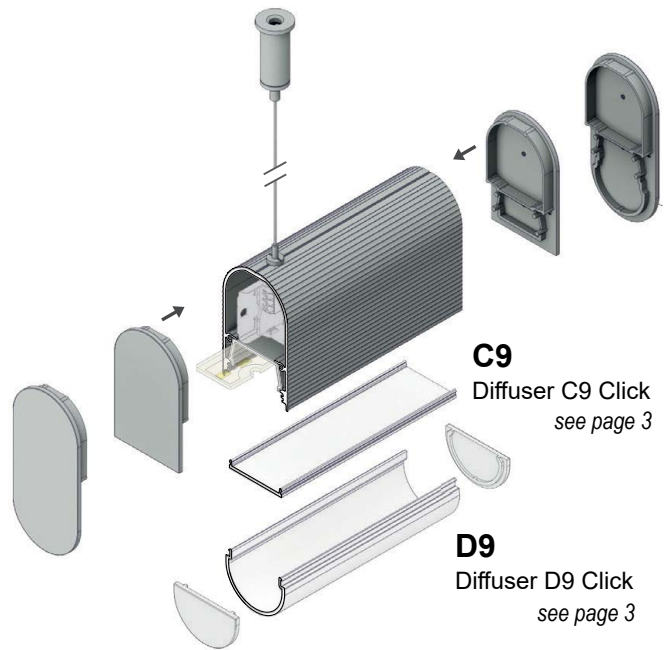

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Diffusers



**V3450016** - 39.4 in  
**V3460016** - 78.7 in  
**V3470016** - 118.1 in  
**V3480016** - 161.4 in  
Diffuser C9 click  
*transparent*




**V3450038** - 39.4 in  
**V3460038** - 78.7 in  
**V3470038** - 118.1 in  
**V3480038** - 161.4 in  
Diffuser C9 click  
*opal*



**V3450041** - 39.4 in  
**V3460041** - 78.7 in  
**V3470041** - 118.1 in  
**V3480041** - 161.4 in  
Diffuser C9 click  
*black*



**V3490038** - 39.4 in  
**V3500038** - 78.7 in  
**V3510038** - 118.1 in  
**V3520038** - 161.4 in  
Diffuser D9 click  
*opal*

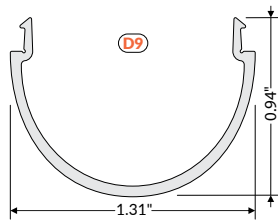

**V4980038**  
End Caps D9  
*opal*

Job Name/Date:

Fixture Type Designation: