

SPY 90 ADJUSTABLE SPOTLIGHT

SPY is a versatile outdoor floodlight, also available as a downlight, that comes in three sizes and is 355° rotatable, for fulfilling every lighting situation. It has optics set back from the edge of the main body to allow precision without glare. Also available in a wall or 'treehugger' version which can be secured to branches, poles or other supports. Spy 90 Adjustable Spotlight is the 3.5" diameter version with 15.5W power, adjustable 90°, and mounting for pole or tree. Pole and tree by others.

TECHNICAL DATA

Wattage	15.5W
Power Supply	Integral 120VAC
Dimming	On/Off
Construction	Body: 6026 Anticorodal Aluminum Bracket: Extruded Aluminum Visor: Stainless Steel Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U1-G0 (14°-45°, 3000K) B2-U0-G0 (36°, 3000K) B1-U0-G0 (60°, 3000K)
CRI	>80
Delivered Lumens	1219 lm (3000K)
Efficacy	78.6 lm/W (3000K)
Optics	15°, 36°, 60°, 15°-45° Zoom
Finishes	Anthracite, Dark Brown, Dark Green
Lumen Maintenance	55,000 hrs (Ta 50°C)
Fixture Dimensions	Ø3.54" x 6.69" l x 3.54" h
IP Rating	IP66
Impact Resistance	IK06



SPY 90 ADJ. SPOTLIGHT for POLE



SPY 90 ADJ. SPOTLIGHT for TREE

Fixture Dimensions - see page 2

ORDERING INFORMATION


Example: F73106.1.3.89.02.US. Power Supplies ordered separately.

					.US
Model No.	Finish	CCT	Optics	Cable Length	
F73106 - Pole Version	1 - Anthracite	2 - 2700K	87 - 15°	01 - 4.92'	.US
F73115 - Tree Version	8 - Dark Brown	3 - 3000K	89 - 36°	02 - 16.40'	
	D - Dark Green	4 - 4000K	56 - 60°	03 - 32.81'	
			91 - 15°-45° Zoom	04 - 49.21'	


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

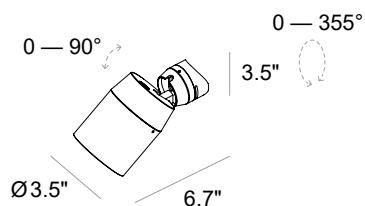


SPY 90 ADJ. SPOTLIGHT
FOR POLE (by others)



SPY 90 ADJ. SPOTLIGHT
FOR TREE

ACCESSORIES

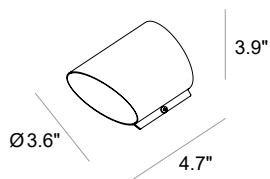

A0020
Visor for SPY 90




A1611
Shadow-effect Filter
for SPY 90

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 14636.9

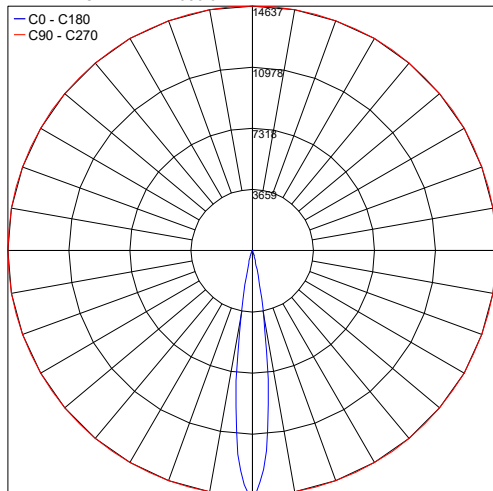

PHOTOMETRIC FILENAME : SPY 90 POLE MOUNT 30K 15° - 73106.X.3.87.IES

Maximum Candela = 8302.8

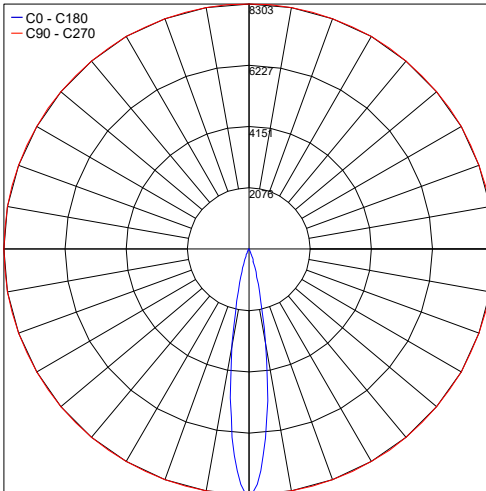



PHOTOMETRIC FILENAME : SPY 90 POLE MOUNT 30K 16° - 45° - 73106.X.3.91.IES

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K

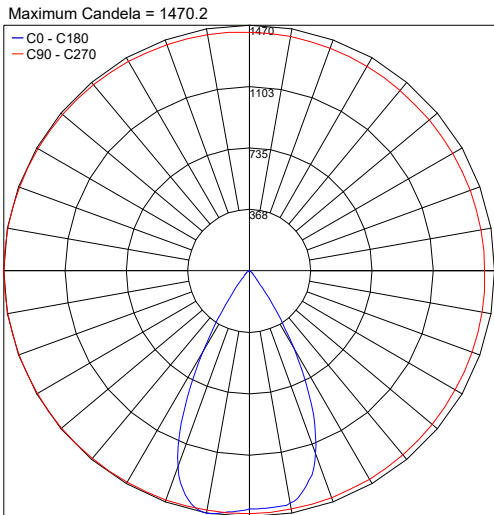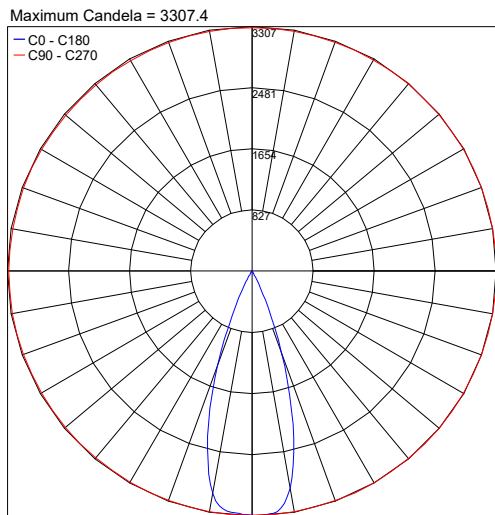

Job Name/Date:

Fixture Type Designation: