

MOK BOLLARD 3300

360° EMISSION

MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Bollard 3300 is a 130.0" height version with 360° light emission, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 3 color temperatures and 3 standard finishes.

designplan®


datasheet



TECHNICAL DATA

Wattage	22W
Power Supply	Integral 120VAC
Dimming	On/Off
Construction	Body: Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U1-G1
CRI	>80
Delivered Lumens	1585 lm (3000K)
Efficacy	72.1 lm/W (3000K)
Optics	360°
Finishes	Anthracite ALU Gray (RAL 9006) Dark Brown
Lumen Maintenance	85,000 hrs (Ta 35°C)
Fixture Dimensions	Ø6.61" x 5.87" w x 130.12" h
IP Rating	IP65, IP68 (Fast connection)
Impact Resistance	IK09

Fixture Dimensions

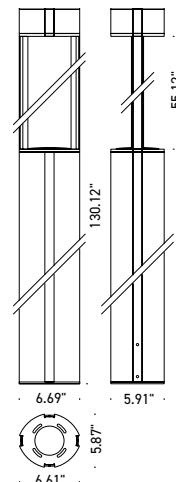

ORDERING INFORMATION

Example: F62069.1.2.67.US. Accessories ordered separately.

F62069	.	.	67	.	US
Model No.	Finish	CCT	Optics		
F62069	1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	67 - Double Emission (360°)		US

Job Name/Date:

Fixture Type Designation:

MOK BOLLARD 3300


360° EMISSION

designplan®

datasheet

ACCESSORIES


Installation

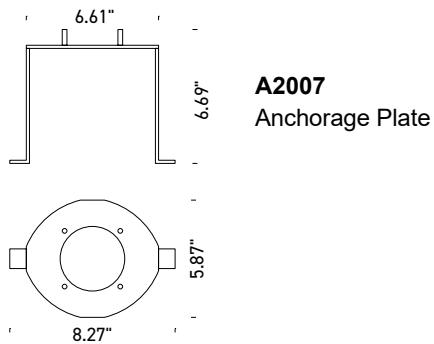

PHOTOMETRIC DATA

Note: All Photometry is 3000K

Maximum Candela = 992.9

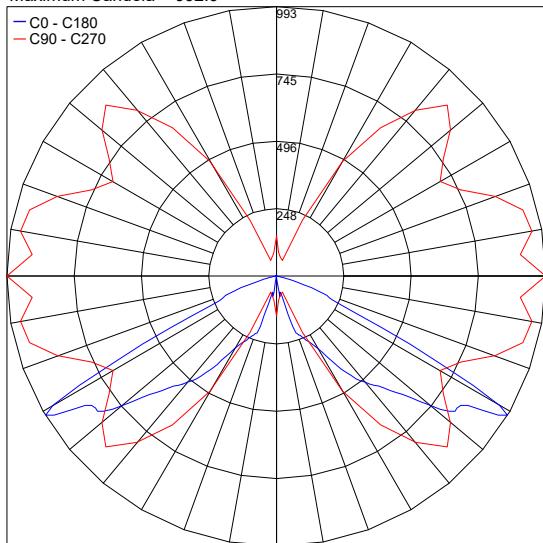

PHOTOMETRIC FILENAME : MOK 360° BOLLARD 3300 130IN 30K - 62069.X.3.67.IES

Job Name/Date:

Fixture Type Designation: