

Kahlo Wood is an outdoor LED bollard with a Ø2.4" round head and real teak or simulated wood set in the body. It is offered in 2 heights – 2-foot or 3-foot – with 3 static white color temperatures, 3 optics options, and 1 wood and 3 simulated wood options with 5 standard finishes. Dark Sky compliant.


TECHNICAL DATA

Wattage	20W
Power Supply	Integral 120VAC
Dimming	0-10V Dimming
Construction	Body: Aluminum Lens: Clear
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U0-G0 (3000K - All Optics)
CRI	>90
Delivered Lumens	1428 lm (24°, 3000K) 1356 lm (36°, 3000K) 1565 lm (Asym, 3000K) Dark Sky compliant
Efficacy	71.4 lm/W (24°, 3000K) 67.8 lm/W (36°, 3000K) 78.3 lm/W (Asym, 3000K)
Optics	24°, 36°, Asymmetric
Finishes	4 Wood Types - see below or page 2 5 Standard, Custom RAL on request
Fixture Dimensions	Pole: 2.56" l x 2.20" w x 24.00" h or 36.00" h Head: Ø2.38" x 1.42" h
IP Rating	IP65



MADE IN THE U.S.A. - Teak Wood Shown

Fixture Dimensions

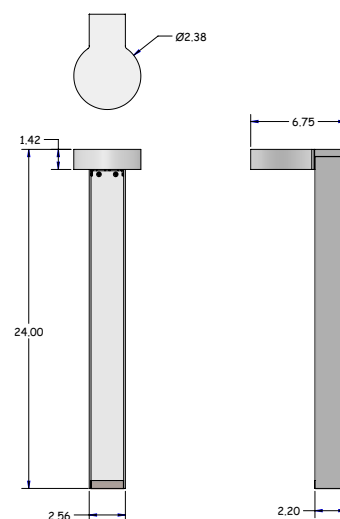

ORDERING INFORMATION


Example: KAH-L-1-30-01-RW-11-C-0. Accessories ordered separately.

KAH-L	-		-		-		-	C	-	0
Model #	Height	CCT	Optics	Wood Finish	Finish	Dimming	Options			
KAH-L	1 - 24"	27 - 2700K	01 - 24°	RW - Rose Wood	11 - White Suede	C - Integral 120VAC	0 - None			
	2 - 36"	30 - 3000K	02 - 36°	AW - Amber Wood	02 - Black Suede	0-10V Dimming				
		40 - 4000K	03 - Asym.	BW - Black Walnut	03 - Gray					
				TK - Real Teak Wood	18 - Tex. Bronze					
					TS - Silver					
					C - Custom					

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation



AM-00010
Mounting Base
Assembly

WOOD FINISHES



Black Walnut



Rose Wood




Amber Wood


Real Teak Wood - Shown in Main Image on Page 1

PHOTOMETRICS


Note: All photometry is 3000K

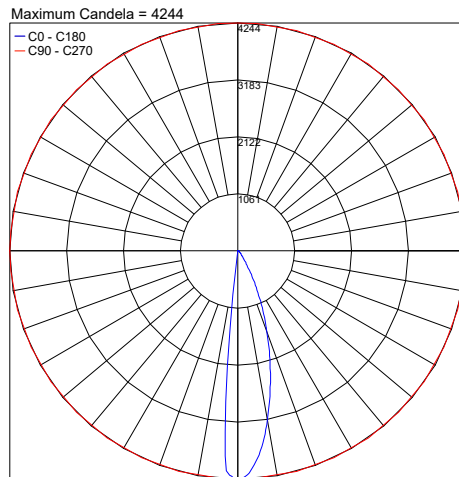

PHOTOMETRIC FILENAME : KLIMPT-KAHLO BOLLARD 24FT 30K 24\".IES

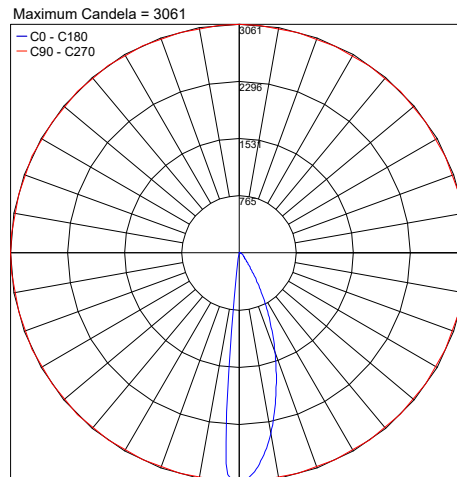

PHOTOMETRIC FILENAME : KLIMPT-KAHLO BOLLARD 24FT 30K 36\".IES

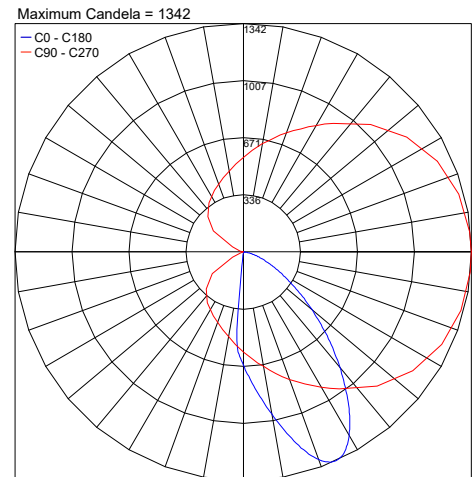

PHOTOMETRIC FILENAME : KLIMPT-KAHLO BOLLARD 24FT 30K ASYM\".IES

Job Name/Date:

Fixture Type Designation: