

MUSE STILLA WALL


MUSE is a modular outdoor lamp system that offers multiple lighting solutions based on the needs of the user, by combining one of the 3 emission sources - CAPSULE, STILLA and SPOT - with various installation accessories. MUSE STILLA WALL is the wall mounted version with an extra resilient sandblasted glass cylinder on a compact base offered in 3.9" length with a black finish on base.



TECHNICAL DATA

Wattage	1.5W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Anodized Aluminum Lens: Sandblasted Glass
CCT	2700K, 3000K
CRI	>90
BUG Rating	B0-U2-G1 (3000K)
Delivered Lumens	255 lm (3000K)
Efficacy	170 lm/W
Optics	Diffuse - 360° Rotatable
Finishes	Black
Fixture Dimensions	Ø1.42" x 3.94" l Base: Ø3.03
LED Source	Mid Power LEDs
IP Rating	IP65
Impact Resistance	IK05

Fixture Dimensions

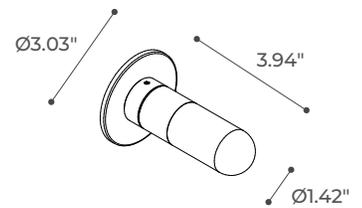

ORDERING INFORMATION

Example: D90203263.US. Power supplies / accessories ordered separately.

D9020		7	US
Model No.	CCT	Finish	
D9020	3263 - 2700K	7 - Black	US
	1263 - 3000K		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00149	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-5
PPLT00543	0-10V Dimming (to 15%) (-40°C / -40°F cold start)	120-277VAC to 24VDC, 100W, Class 2	7-53

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-51

DRIVERS IN NEMA 4X ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-51

For other power supply options consult factory.


PHOTOMETRIC DATA

Maximum Candela = 97.9

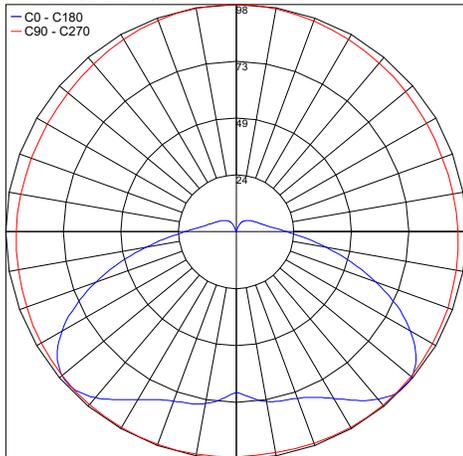

PHOTOMETRIC FILENAME : MUSE-STILLA-2700K-SHORT-GLASS-24V.IES

Maximum Candela = 102

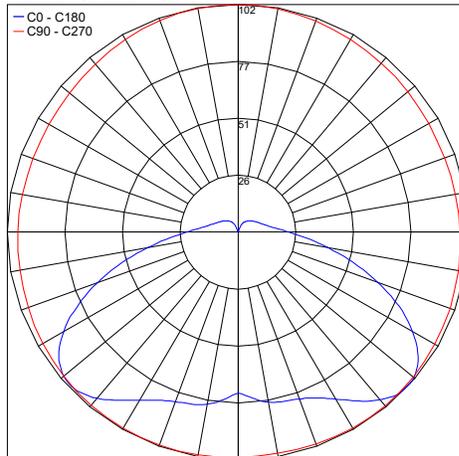

PHOTOMETRIC FILENAME : MUSE-STILLA-3000K-SHORT-GLASS-24V.IES

Job Name/Date:

Fixture Type Designation: